US005819107A

United States Patent [19]

Lichtman et al.

[11] Patent Number: 5,819,107

[45] Date of Patent: Oct. 6, 1998

2

[54] **METHOD FOR MANAGING THE ASSIGNMENT OF DEVICE DRIVERS IN A COMPUTER SYSTEM**

[75] Inventors: **Moshe Lichtman**, Bellevue; **Mark R. Enstrom**, Redmond; **Thomas E. Lennon**, Seattle; **Ralph A. Lipe**, Woodinville; **Pierre-Yves Santerre**, Bellevue; **Robert T. Short**, Kirkland; **David W. Voth**, Redmond, all of Wash.

[73] Assignee: **Microsoft Corporation**, Redmond, Wash.

[21] Appl. No.: **480,761**

[22] Filed: **Jun. 7, 1995**

Related U.S. Application Data

[62] Division of Ser. No. 250,698, May 27, 1994.

[51] **Int. Cl.**[6] **G06F 13/22**; G06F 15/40

[52] **U.S. Cl.** **395/828**; 395/835; 395/837; 395/681

[58] **Field of Search** 395/821, 828, 395/837, 835, 681

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,268,901	5/1981	Subrizi et al. .	
4,317,183	2/1982	Shimizu et al.	364/900
4,562,535	12/1985	Vincent et al.	364/200
4,589,063	5/1986	Shah et al.	364/200
4,660,141	4/1987	Ceccon et al.	364/200
4,727,475	2/1988	Kiremidjian	364/200
4,727,480	2/1988	Albright et al.	364/200
4,730,251	3/1988	Aakre et al.	364/200
4,974,151	11/1990	Advani et al.	364/200
4,982,325	1/1991	Tignor et al.	364/200
5,038,294	8/1991	Arakawa et al.	364/491
5,109,484	4/1992	Hughes et al.	395/200
5,136,709	8/1992	Shirakabe et al.	395/700
5,157,384	10/1992	Greanias et al.	340/706
5,197,093	3/1993	Knuth et al.	379/61
5,247,682	9/1993	Kondou et al.	395/700
5,249,270	9/1993	Stewart et al. .	
5,252,951	10/1993	Tannenbaum et al.	345/156
5,257,368	10/1993	Benson et al.	395/600
5,257,379	10/1993	Cwiakala et al.	395/700
5,257,387	10/1993	Richek et al.	395/800
5,263,148	11/1993	Jones, Jr. et al. .	
5,289,372	2/1994	Guthrie et al.	364/403
5,297,262	3/1994	Cox et al.	395/325

(List continued on next page.)

OTHER PUBLICATIONS

"Card Ware™ User Manual 1.50A," released on Oct. 8, 1993 by Award Software International, Inc., pp. 1–33.

Primary Examiner—Thomas C. Lee
Assistant Examiner—Rehama Perveen
Attorney, Agent, or Firm—Jones & Askew, LLP

[57] **ABSTRACT**

A system for managing the assignment of device drivers to devices of a computer system. The computer system can maintain device-related information for a primary device and for devices that are "compatible" with the primary device. This device information supplies an indication of whether a device driver intended for primary use with a device is maintained by the computer system. Moreover, the device information provides an indication of whether one or more device drivers compatible with the primary device are maintained by the computer system. During assignment of device drivers to devices of the computer system, the device information is examined to determine whether the intended device driver for the primary device is available to support the operations of that device. If not, the device information is examined to determine whether a device driver for a device that is compatible with the primary device is available for supporting computer operations of the primary device. In this event, if the device information lists more than one device that is compatible with the primary device, then the compatible device having the highest priority or ranking can be selected and the device driver for the selected device is used to support the operations of the primary device.

21 Claims, 10 Drawing Sheets

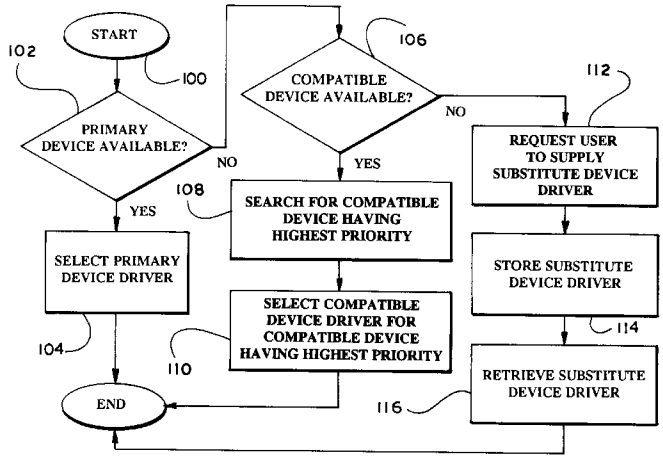

U.S. PATENT DOCUMENTS

5,319,790	6/1994	Kumagai	395/800
5,335,350	8/1994	Felderman et al. .	
5,359,713	10/1994	Moran et al.	395/200
5,371,492	12/1994	Lohrbach et al. .	
5,379,431	1/1995	Lemon et al. .	
5,386,551	1/1995	Chikira et al. .	
5,386,567	1/1995	Lien et al.	395/700
5,408,618	4/1995	Aho et al.	395/325
5,412,798	5/1995	Garney .	
5,420,987	5/1995	Reid et al. .	
5,428,748	6/1995	Davidson et al. .	
5,432,941	7/1995	Crick et al.	395/700
5,450,570	9/1995	Richek et al. .	
5,452,454	9/1995	Basu et al. .	
5,454,078	9/1995	Heimsoth et al. .	
5,459,867	10/1995	Adams et al. .	
5,459,869	10/1995	Spilo .	
5,469,545	11/1995	Vanbuskirk et al.	395/200.01
5,485,460	1/1996	Schrier et al. .	
5,491,813	2/1996	Bondy et al.	395/500
5,517,636	5/1996	DeHart et al.	395/500
5,517,646	5/1996	Piccirillo et al.	395/700
5,553,281	9/1996	Brown et al.	395/600

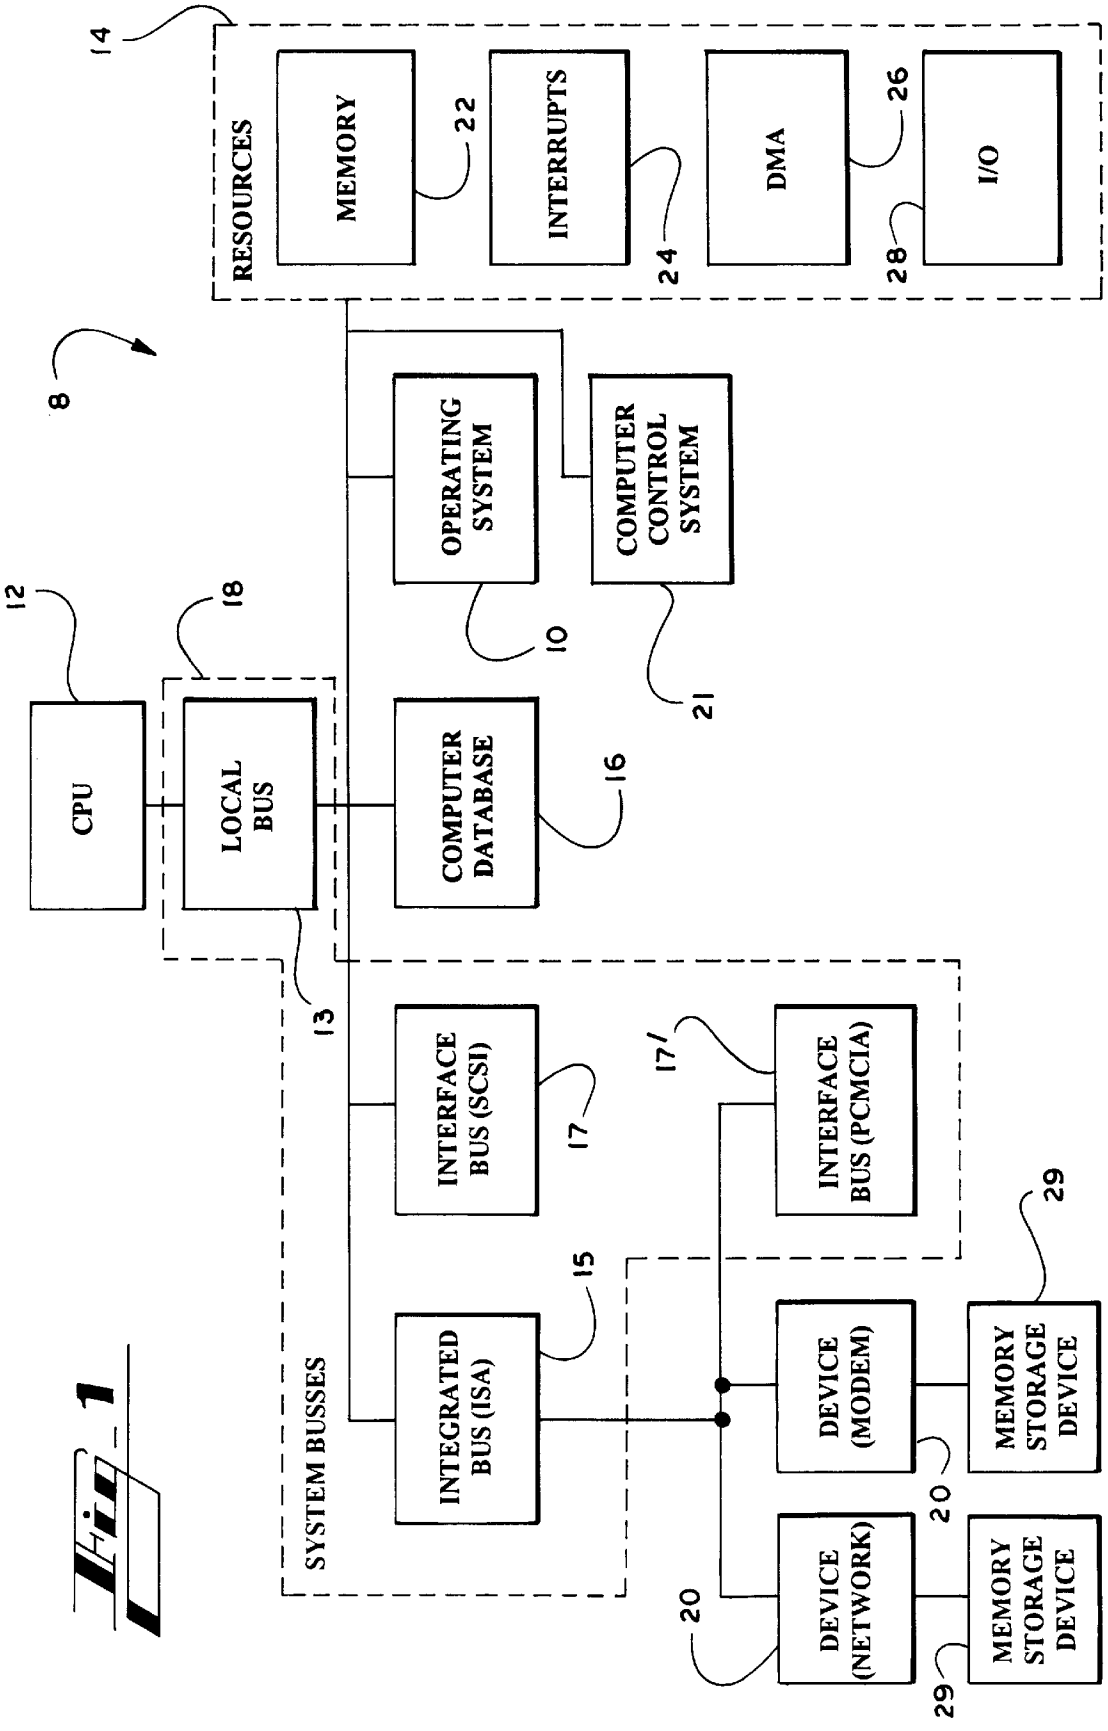
14
RESOURCES
MEMORY
22
INTERRUPTS
24
DMA
26
I/O
28
8
OPERATING SYSTEM
10
COMPUTER CONTROL SYSTEM
21
12
CPU
18
LOCAL BUS
COMPUTER DATABASE
16
13
SYSTEM BUSSES
INTERFACE BUS (SCSI)
17
17'
INTERFACE BUS (PCMCIA)
15
INTEGRATED BUS (ISA)
DEVICE (MODEM)
29
MEMORY STORAGE DEVICE
20
DEVICE (NETWORK)
20
MEMORY STORAGE DEVICE
29

Fig. 1

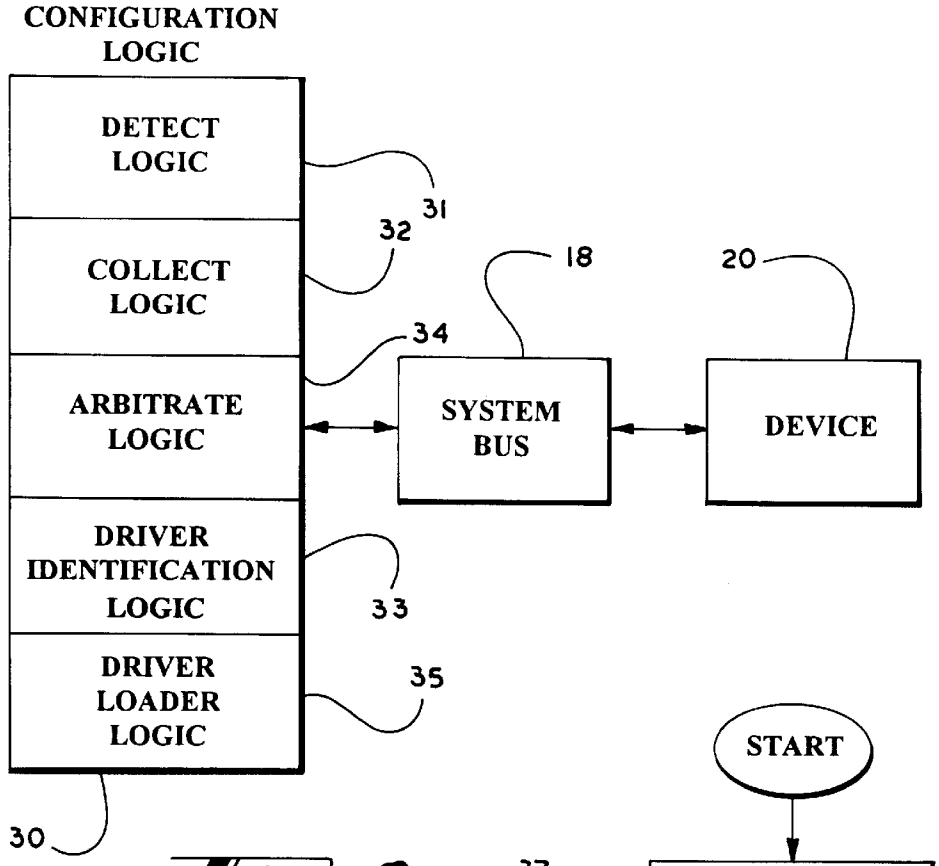
CONFIGURATION LOGIC
DETECT LOGIC
COLLECT LOGIC
ARBITRATE LOGIC
DRIVER IDENTIFICATION LOGIC
DRIVER LOADER LOGIC
31
32
34
33
35
30
18
20
SYSTEM BUS
DEVICE

Fig_2

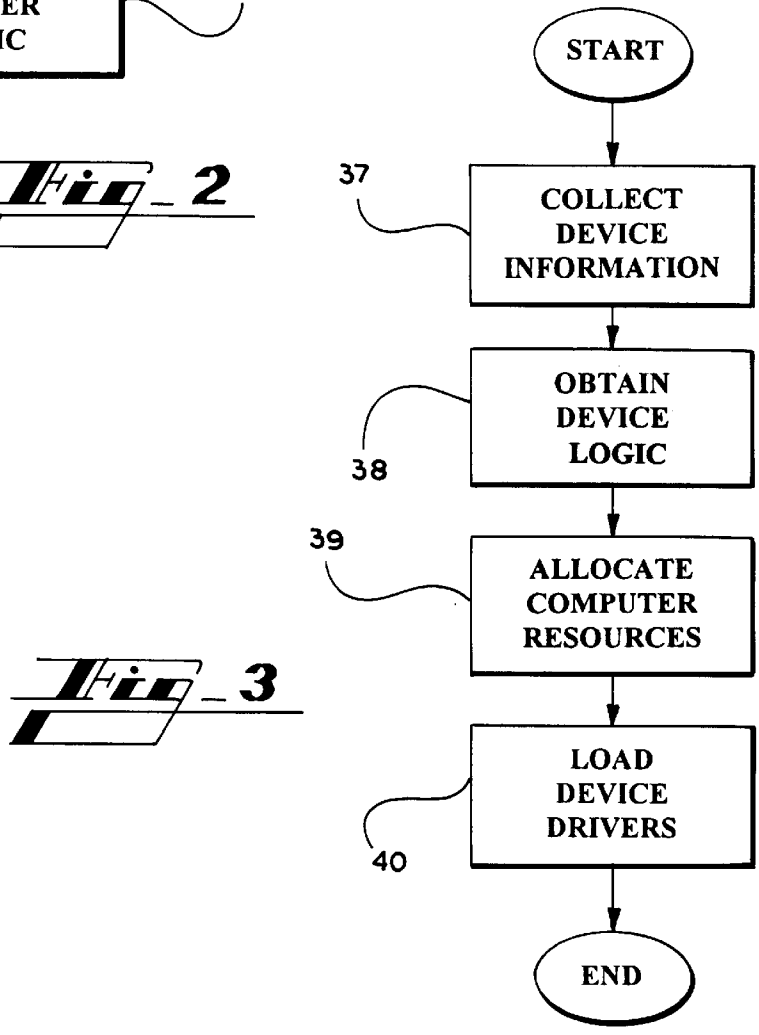
START
COLLECT DEVICE INFORMATION
OBTAIN DEVICE LOGIC
ALLOCATE COMPUTER RESOURCES
LOAD DEVICE DRIVERS
END
37
38
39
40

Fig_3

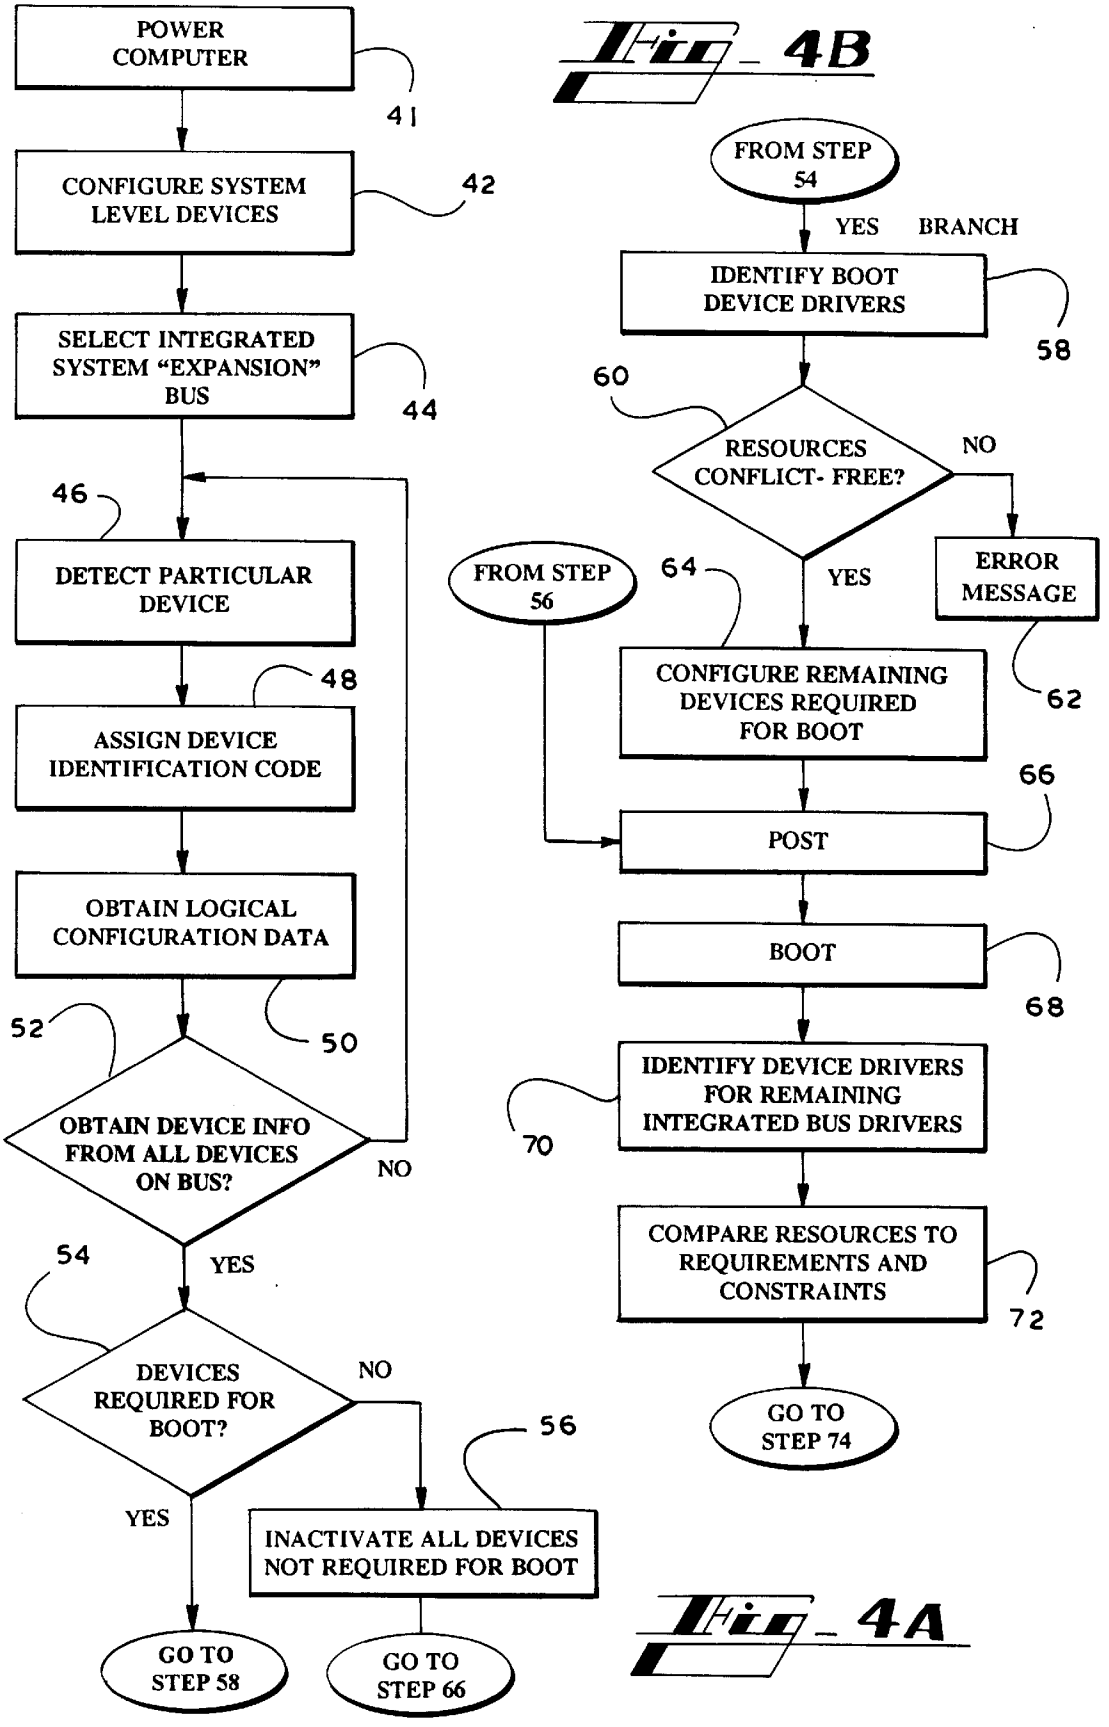
POWER COMPUTER
41
CONFIGURE SYSTEM LEVEL DEVICES
42
SELECT INTEGRATED SYSTEM "EXPANSION" BUS
44
46
DETECT PARTICULAR DEVICE
48
ASSIGN DEVICE IDENTIFICATION CODE
OBTAIN LOGICAL CONFIGURATION DATA
50
52
OBTAIN DEVICE INFO FROM ALL DEVICES ON BUS?
NO
YES
54
DEVICES REQUIRED FOR BOOT?
NO
YES
56
INACTIVATE ALL DEVICES NOT REQUIRED FOR BOOT
GO TO STEP 58
GO TO STEP 66
Fig_4A
FROM STEP 54
YES BRANCH
IDENTIFY BOOT DEVICE DRIVERS
58
60
RESOURCES CONFLICT- FREE?
NO
YES
ERROR MESSAGE
62
FROM STEP 56
64
CONFIGURE REMAINING DEVICES REQUIRED FOR BOOT
66
POST
BOOT
68
IDENTIFY DEVICE DRIVERS FOR REMAINING INTEGRATED BUS DRIVERS
70
COMPARE RESOURCES TO REQUIREMENTS AND CONSTRAINTS
72
GO TO STEP 74
Fig_4B

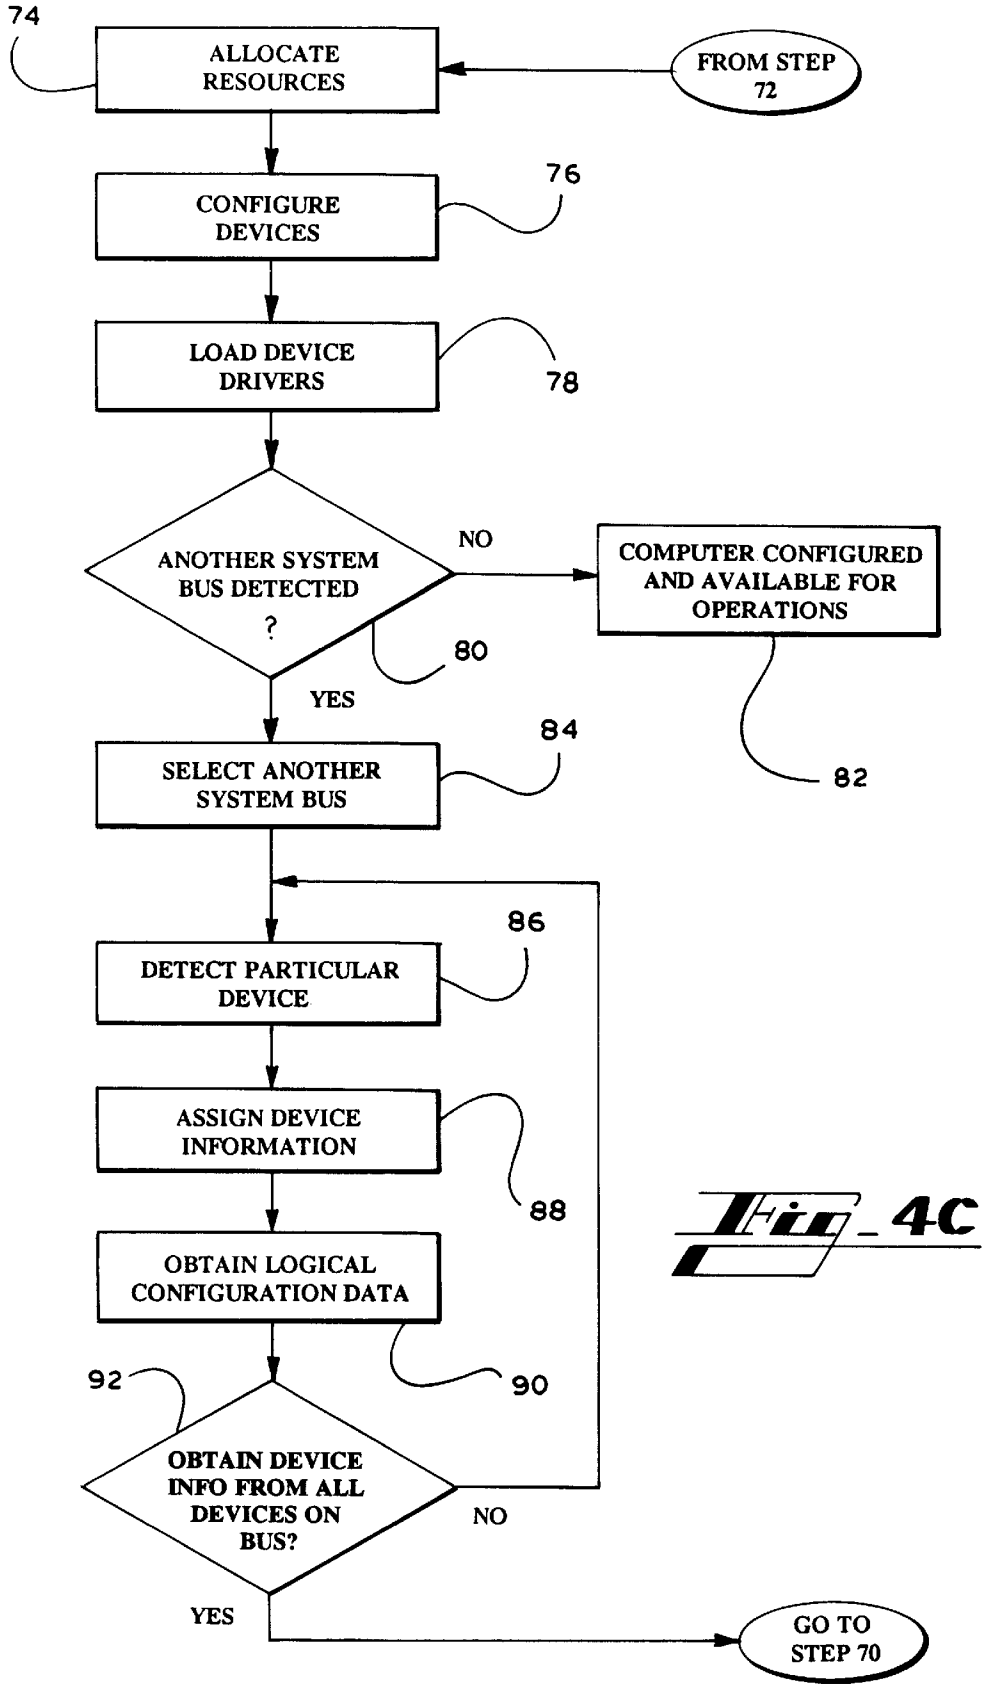
74
ALLOCATE RESOURCES
FROM STEP 72
CONFIGURE DEVICES
76
LOAD DEVICE DRIVERS
78
ANOTHER SYSTEM BUS DETECTED ?
NO
COMPUTER CONFIGURED AND AVAILABLE FOR OPERATIONS
80
82
YES
84
SELECT ANOTHER SYSTEM BUS
86
DETECT PARTICULAR DEVICE
ASSIGN DEVICE INFORMATION
88
OBTAIN LOGICAL CONFIGURATION DATA
90
92
OBTAIN DEVICE INFO FROM ALL DEVICES ON BUS?
NO
YES
GO TO STEP 70

Fig. 4C

Fig_5

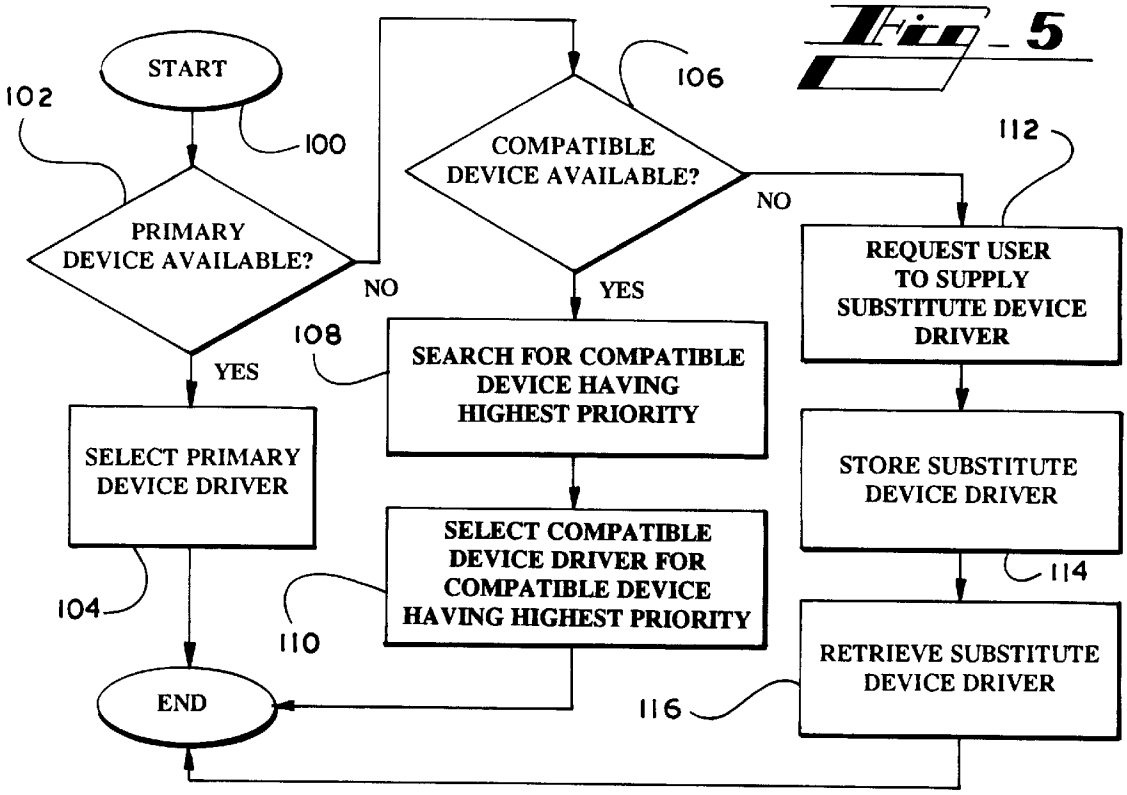
START
100
102
PRIMARY DEVICE AVAILABLE?
NO
YES
104
SELECT PRIMARY DEVICE DRIVER
106
COMPATIBLE DEVICE AVAILABLE?
NO
YES
108
SEARCH FOR COMPATIBLE DEVICE HAVING HIGHEST PRIORITY
110
SELECT COMPATIBLE DEVICE DRIVER FOR COMPATIBLE DEVICE HAVING HIGHEST PRIORITY
112
REQUEST USER TO SUPPLY SUBSTITUTE DEVICE DRIVER
114
STORE SUBSTITUTE DEVICE DRIVER
116
RETRIEVE SUBSTITUTE DEVICE DRIVER
END

Fig_6

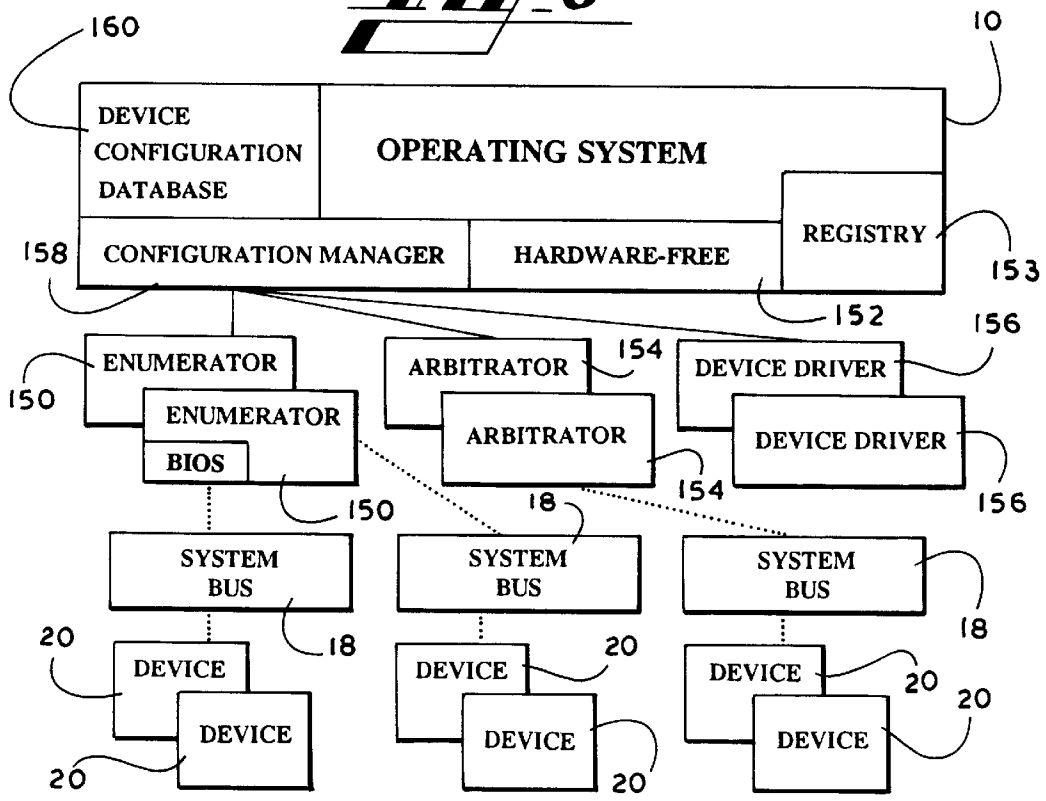
160
DEVICE CONFIGURATION DATABASE
OPERATING SYSTEM
10
CONFIGURATION MANAGER
HARDWARE-FREE
REGISTRY
153
158
152
156
ENUMERATOR
150
ENUMERATOR
BIOS
150
ARBITRATOR
154
ARBITRATOR
154
DEVICE DRIVER
DEVICE DRIVER
156
18
SYSTEM BUS
18
SYSTEM BUS
SYSTEM BUS
18
20
DEVICE
DEVICE
20
DEVICE
20
DEVICE
20
DEVICE
20
20

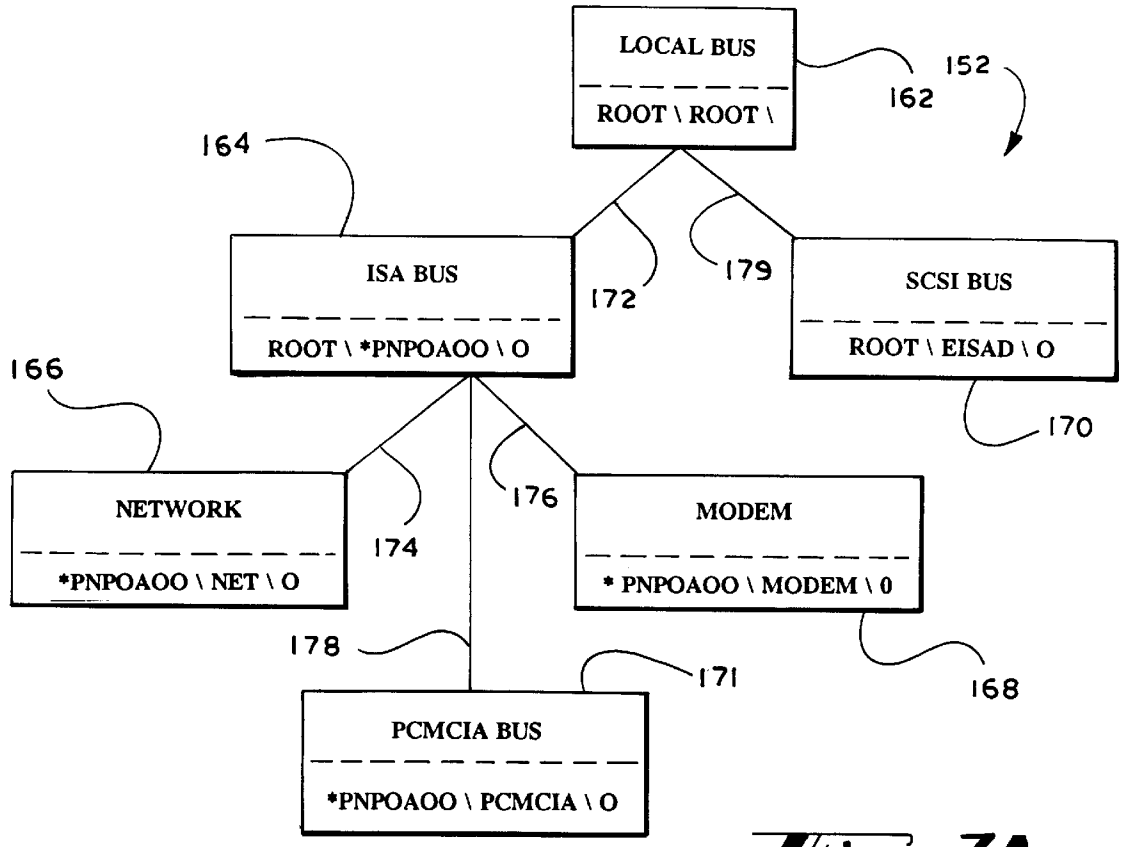
LOCAL BUS
ROOT \ ROOT \
152
162
164
ISA BUS
ROOT \ *PNPOAOO \ O
172
179
SCSI BUS
ROOT \ EISAD \ O
170
166
NETWORK
*PNPOAOO \ NET \ O
174
176
MODEM
* PNPOAOO \ MODEM \ 0
168
178
171
PCMCIA BUS
*PNPOAOO \ PCMCIA \ O

Fig. 7A

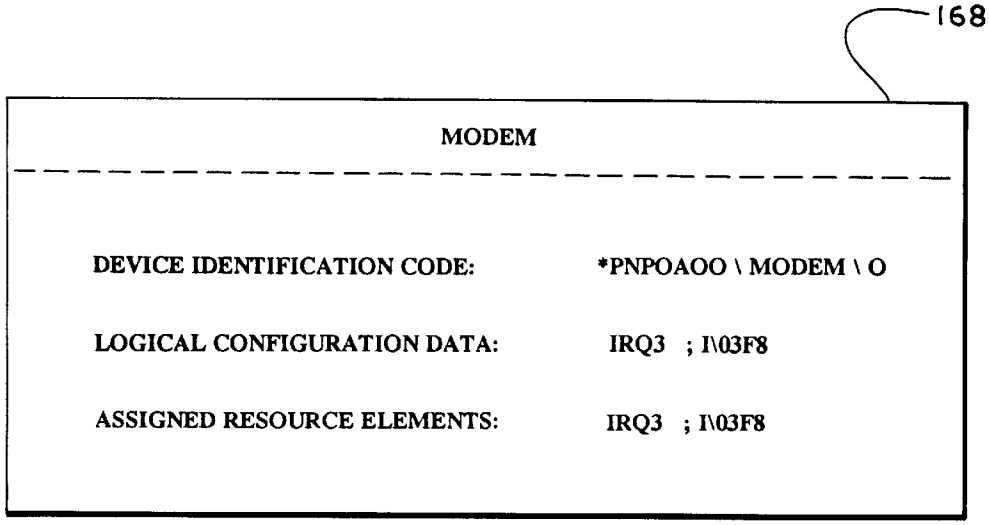
168
MODEM
DEVICE IDENTIFICATION CODE: *PNPOAOO \ MODEM \ O
LOGICAL CONFIGURATION DATA: IRQ3 ; I\03F8
ASSIGNED RESOURCE ELEMENTS: IRQ3 ; I\03F8

Fig. 7B

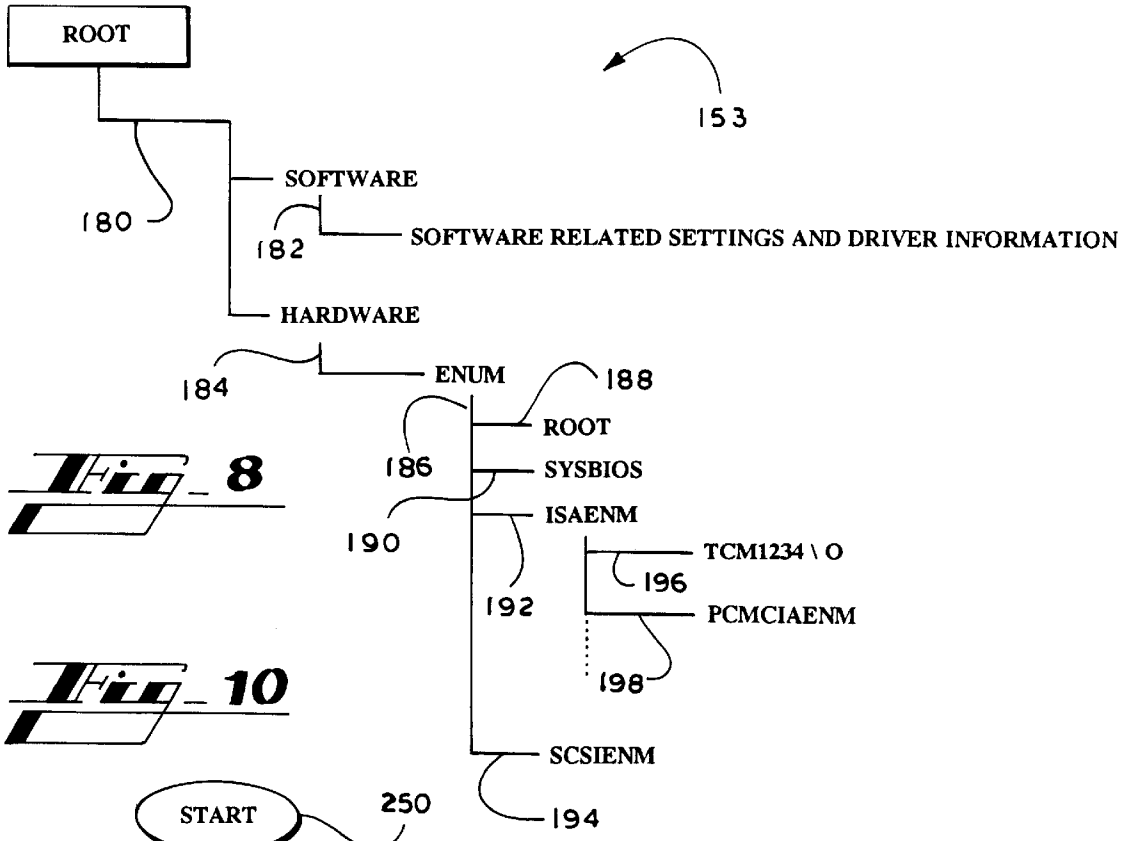
ROOT
153
180
SOFTWARE
182
SOFTWARE RELATED SETTINGS AND DRIVER INFORMATION
HARDWARE
184
ENUM
188
ROOT
186
SYSBIOS
ISAENM
190
TCM1234\O
196
192
PCMCIAENM
198
SCSIENM
194

Fig_8

Fig_10

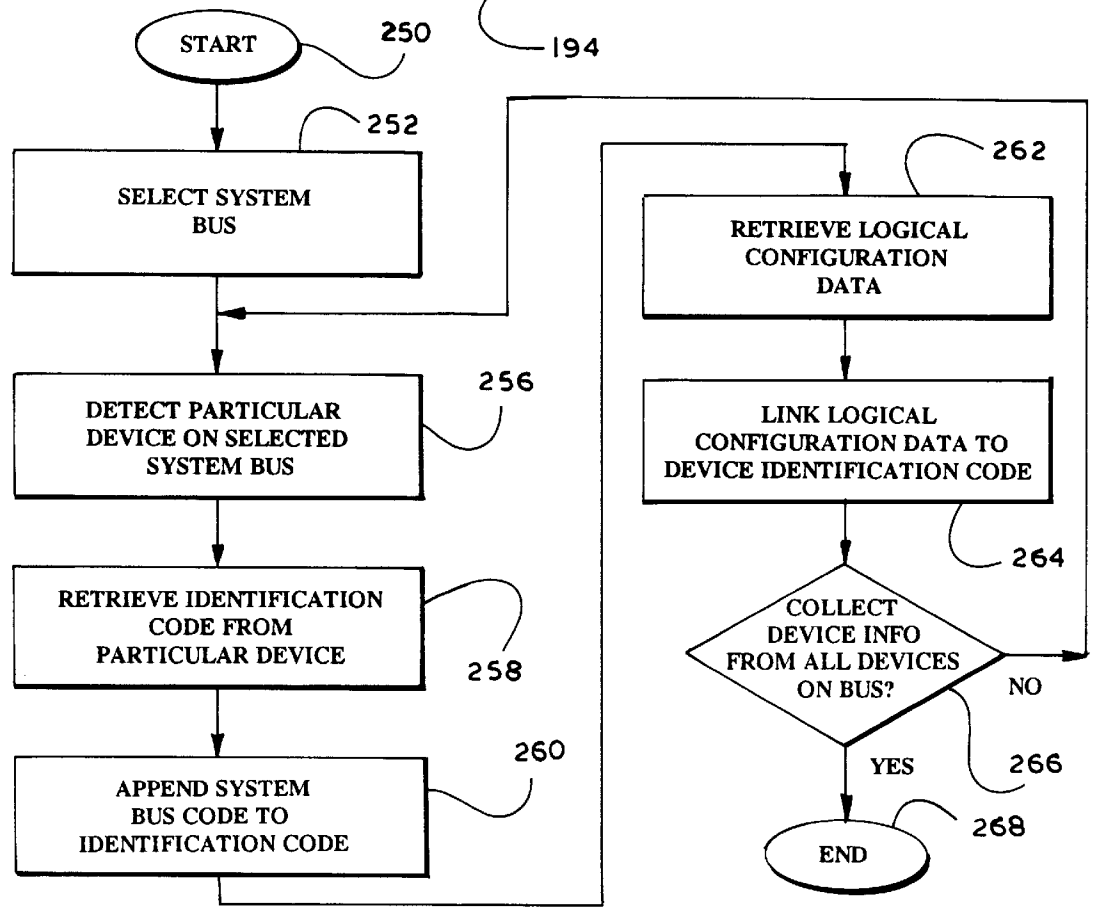
START
250
252
SELECT SYSTEM BUS
DETECT PARTICULAR DEVICE ON SELECTED SYSTEM BUS
256
RETRIEVE IDENTIFICATION CODE FROM PARTICULAR DEVICE
258
APPEND SYSTEM BUS CODE TO IDENTIFICATION CODE
260
262
RETRIEVE LOGICAL CONFIGURATION DATA
LINK LOGICAL CONFIGURATION DATA TO DEVICE IDENTIFICATION CODE
264
COLLECT DEVICE INFO FROM ALL DEVICES ON BUS?
NO
266
YES
268
END

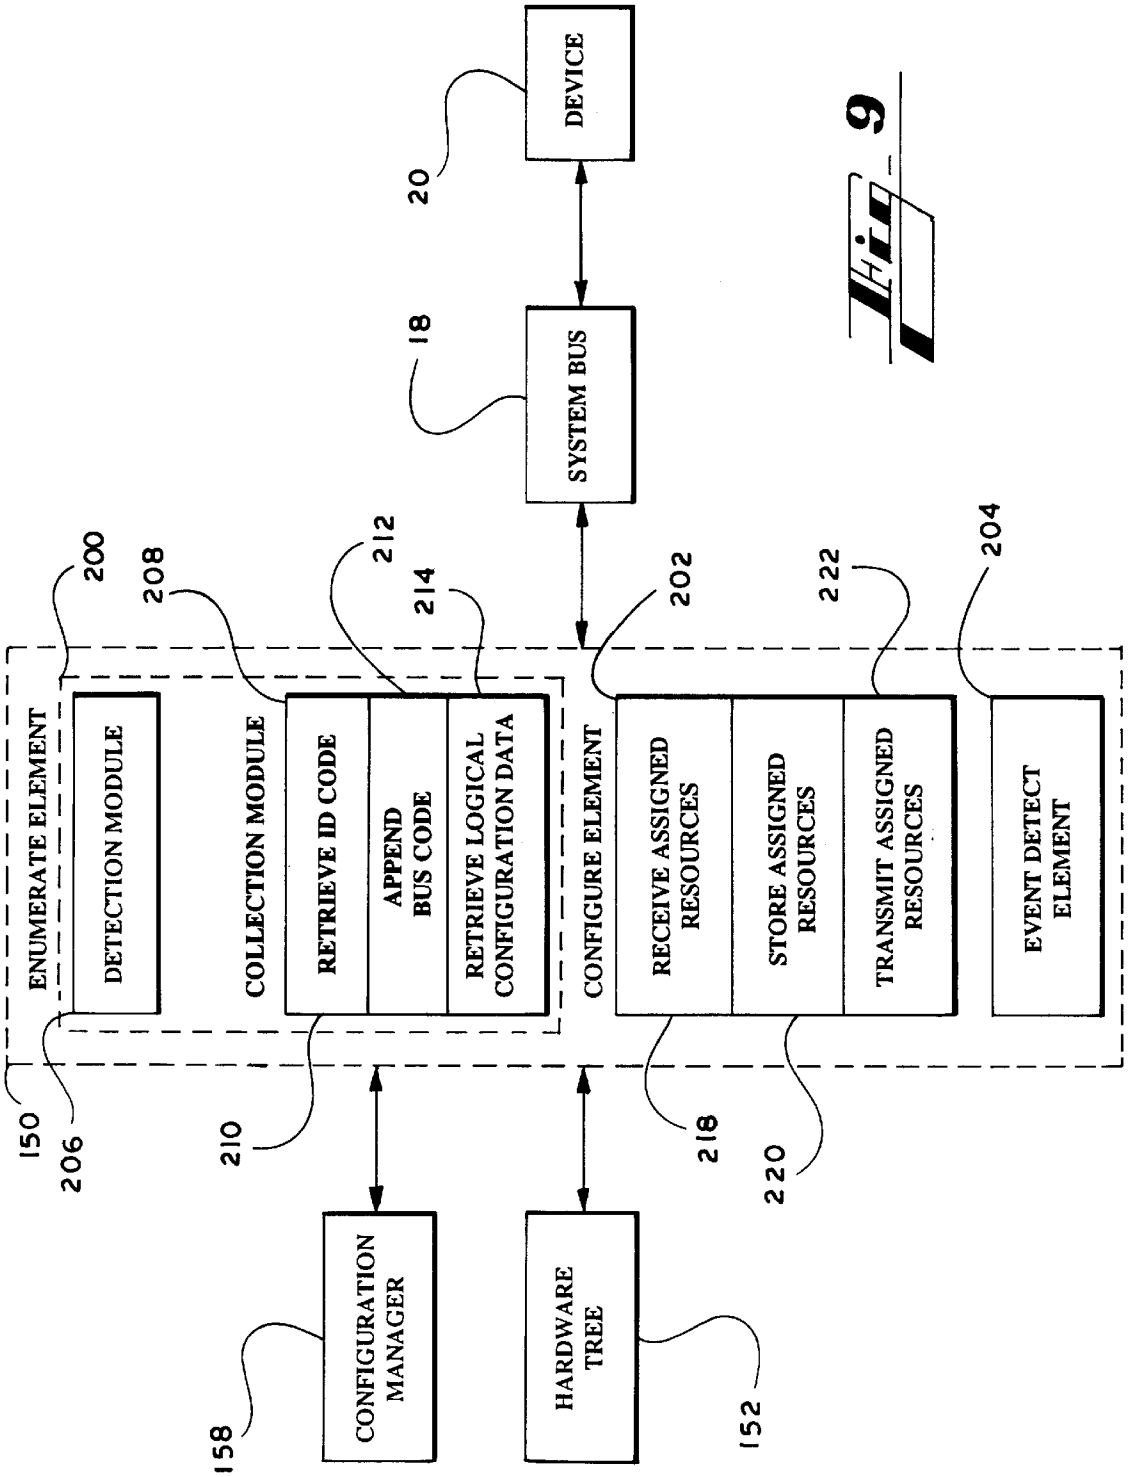
DEVICE
20
SYSTEM BUS
18
200
208
212
214
202
222
204
ENUMERATE ELEMENT
DETECTION MODULE
COLLECTION MODULE
RETRIEVE ID CODE
APPEND BUS CODE
RETRIEVE LOGICAL CONFIGURATION DATA
CONFIGURE ELEMENT
RECEIVE ASSIGNED RESOURCES
STORE ASSIGNED RESOURCES
TRANSMIT ASSIGNED RESOURCES
EVENT DETECT ELEMENT
150
206
210
218
220
CONFIGURATION MANAGER
158
HARDWARE TREE
152

Fig. 9

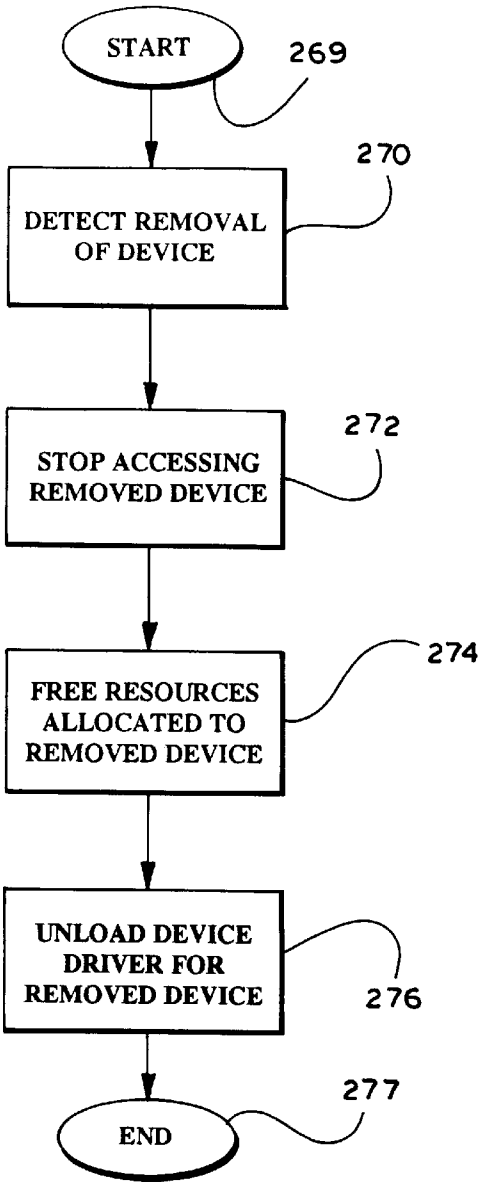

Fig. 11A

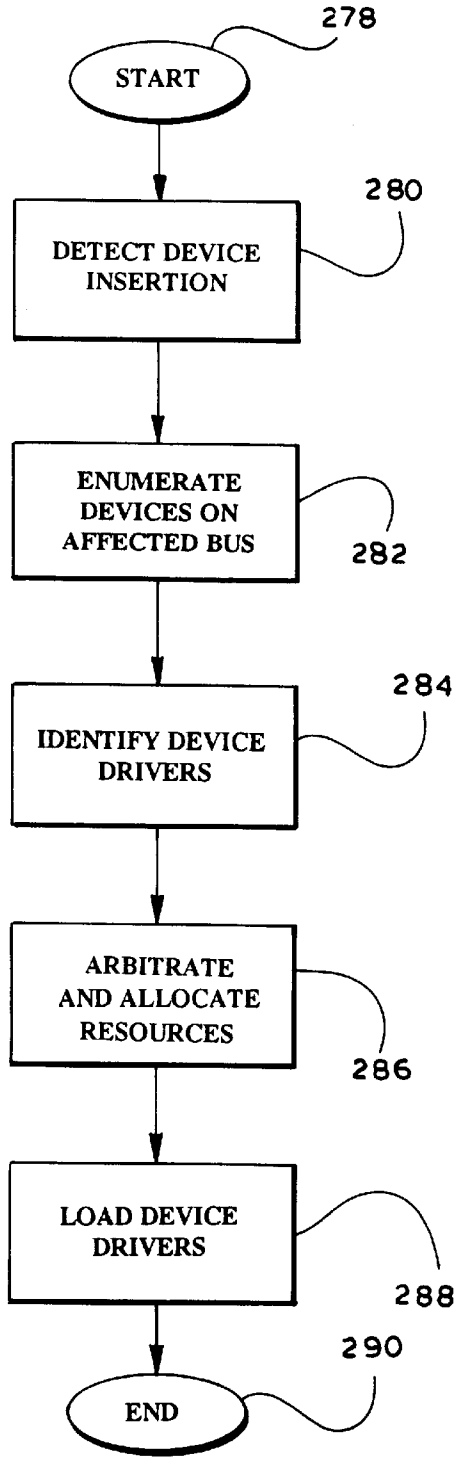

Fig. 11B

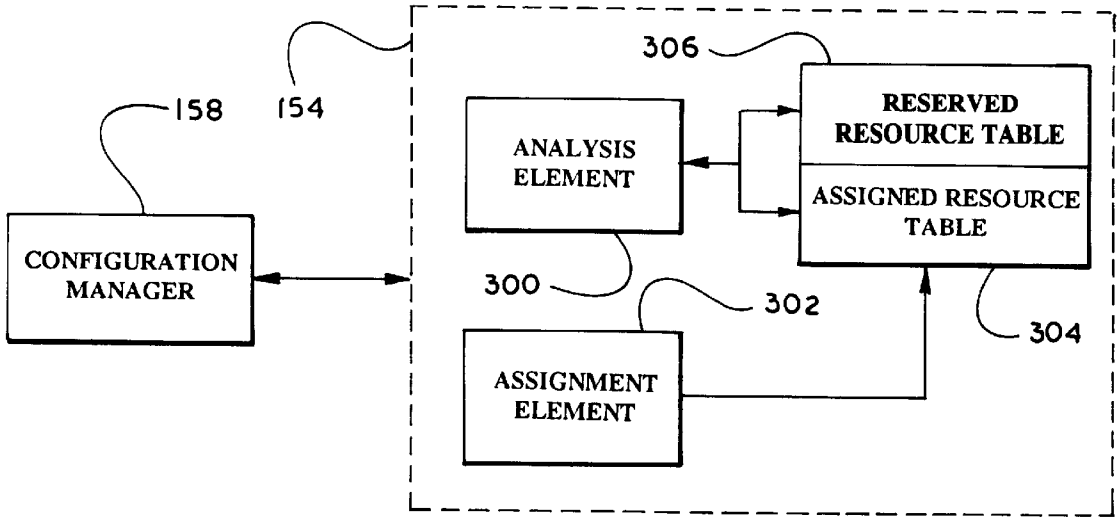
306
158
154
RESERVED RESOURCE TABLE
ANALYSIS ELEMENT
ASSIGNED RESOURCE TABLE
CONFIGURATION MANAGER
300
302
304
ASSIGNMENT ELEMENT

Fig_12

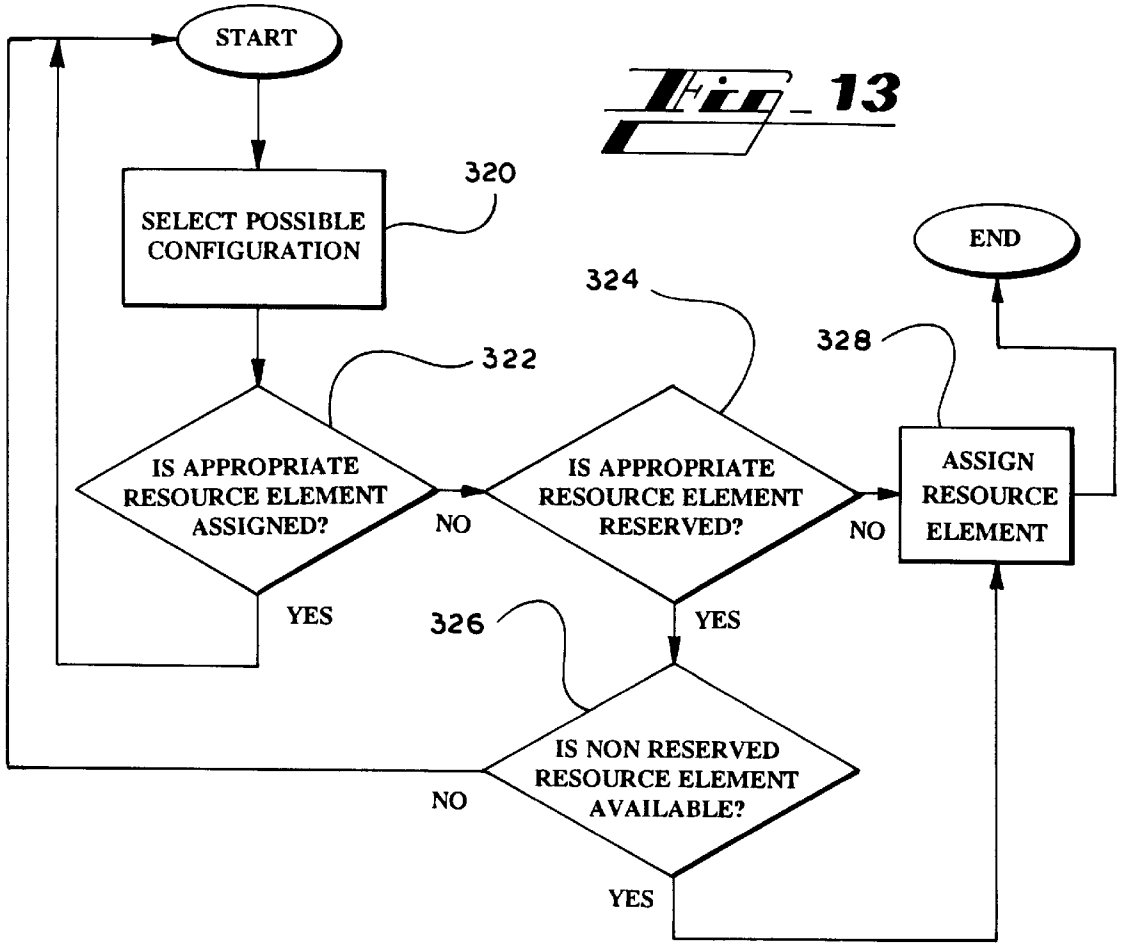
START
320
SELECT POSSIBLE CONFIGURATION
END
324
328
322
IS APPROPRIATE RESOURCE ELEMENT ASSIGNED?
NO
IS APPROPRIATE RESOURCE ELEMENT RESERVED?
NO
ASSIGN RESOURCE ELEMENT
YES
326
YES
IS NON RESERVED RESOURCE ELEMENT AVAILABLE?
NO
YES

Fig_13

METHOD FOR MANAGING THE ASSIGNMENT OF DEVICE DRIVERS IN A COMPUTER SYSTEM

This is a division of application Ser. No. 08/250,698, filed May 27, 1994(now pending allowance).

TECHNICAL FIELD

The present invention relates to data processing systems and, more particularly described, relates to configuring devices for operation with a computer system without user intervention.

BACKGROUND OF THE INVENTION

The process of installing a peripheral device or an add-on type adapter board for use with a personal computer system can be a relatively frustrating experience for the typical computer user. Nevertheless, a computer typically will not operate with a newly installed component until the user has completed a proper allocation of resources. Computer resources are allocated during a configuration process to permit the conflict-free use of the limited resources. To configure the computer, the user often must complete a relatively complex series of technical tasks. Thus, the difficulties faced by many users during the configuration process are emphasized by the absence of an automated process for resolving resource conflicts.

For many personal computer systems, neither the operating system nor the application programs running on the computer can determine which hardware components are connected to the computer. Likewise, the various hardware components connected to the computer system often fail to detect the occurrence of a conflict between different hardware devices that attempt to share the same resource. Accordingly, a user typically must resolve a resource conflict by first identifying the problem and thereafter experimenting with hardware and software configurations in an attempt to correct the resource conflict.

When attempting to tackle hardware and software integration issues, the user is exposed to technical concepts that can be somewhat confusing for those without technical training, such as computer architecture issues, including hardware interrupts, direct memory access (DMA) channels, memory addresses, and input/output (I/O) ports. Likewise, many common configuration tasks require the user to be familiar with the finer details of the computer's operating system, including system configuration files, such as Autoexec.Bat, Config.Sys, and *.Ini files. In view of these technical concepts, some users find the configuration process so intimidating that they refuse to consider upgrading a component of their personal computer or connecting a new peripheral device to add a new capability to their computer system.

Unlike today, early personal computers required minimum coordination between the computer hardware and software components. Users were presented with few difficult configuration issues after the initial installation of the computer system. A limited number of peripheral devices were commercially available for supplementing the processing functions of the personal computer. In addition, early personal computers were primarily used for dedicated tasks, such as word processing or calculating financial information with a spreadsheet program, at a fixed desktop location.

In contrast, present computers are often portable systems that can be regularly connected to different peripheral devices and external systems. There exists many more

computer peripheral devices that require the use of resources during computer operation than the limited quantity of available resources. Furthermore, a user can harness the powerful computing operations of a present personal computer to complete numerous tasks outside the traditional realm of word processing and financial calculations, such as graphics, audio, and video. For example, numerous peripheral devices and add-on systems are now commercially available to enable the user to customize the functions and operating characteristics of a personal computer. Docking-type computer systems enable a user to operate a mobile computer at either a base station or in remote locations. Thus, the rapid acceptance of portable computing and the multi-faceted uses of the personal computer emphasize the need for supplying a "user friendly" system that configures new hardware or software devices for use with the computer system.

The Industry Standard Architecture (ISA) standard is a widely used bus architecture for personal computer systems. The ISA expansion bus, which is commonly associated with the IBM Personal Computer AT and other compatible computers, provides a 16-bit bus that supports the connection of adapter boards within the computer. The ISA bus structure requires allocation of resources, such as hardware interrupts, DMA channels, memory addresses, and I/O ports, among multiple ISA-compatible adapter boards connected to the ISA expansion bus. However, the ISA standard does not define a hardware or software mechanism for allocating those resources for use by the installed adapter boards. Consequently, configuration of the ISA adapter boards is typically completed by connecting jumper cables or changing switch settings on the boards to change the decode maps for memory and I/O ports and to direct the DMA channels and interrupt signals to various pins along the expansion bus. Furthermore, system configuration program files of the operating system may need to be updated to reflect any modifications to the resource allocation.

Alternative expansion bus standards, such as the Micro Channel Architecture (MCA) and the Extended Industry Standard Architecture (EISA) standards, have limited hardware and software mechanisms to identify resources requested by a peripheral device and to resolve resource conflicts. However, these mechanisms are not implemented by the computer's operating system and are not compatible with the large installed base of personal computers based on the ISA standard. Furthermore, computer systems implementing the MCA and EISA standards are generally more expensive than ISA-compatible computers and lack the variety of add-on adapter boards and peripheral devices available for use with ISA-compatible computers.

To address the issue of configuration management, the computer industry is at present offering full-featured computer systems having preconfigured hardware and preinstalled software, thereby eliminating the need for a user to conduct the installation and configuration tasks for the purchased computer system. However, this is a somewhat limited solution because vendors typically market a computer system having a standard configuration of hardware and software components. Thus, this approach defeats the flexibility offered by the ISA bus expansion structure because users cannot obtain a computer capable of performing a customized function through this standardized configuration approach.

To overcome the frustration of users with present complicated configuration processes, it would be desirable to provide a system for automatically configuring a peripheral device or adapter board for a computer system. A system is

needed to enable a user to simply connect a device to the computer, turn on the computer, and have the device properly work with the computer. There is a further need for a system that determines the optimal configuration for its resources and enables application programs to fully utilize the available resources.

In recognition of the problems of prior configuration processes, the present invention provides a system that permits easy installation and configuration of devices which are capable of identifying themselves and declaring their services and resource requirements to the computer. The device identification and resource requirement information enable the system to determine and establish a working configuration for all devices connected to the computer, and to load the appropriate device drivers. In this manner, the present invention supports a variety of computer bus architectures and device classes. Accordingly, the present invention efficiently allocates system resources between the devices of the computer system without substantial user intervention.

SUMMARY OF THE INVENTION

The problems associated with the manual installation and configuration of adapter boards and peripheral devices for computer systems are solved by the principles of the present invention. The present invention provides a system for configuring the hardware and software components of a computer system by optimally allocating system resources for use by computer devices.

The present invention enables a user of a computer system to install a new device by connecting the device to the computer, powering the computer, and using the computer to take advantage of the function supplied by the new device. Likewise, the present invention permits a user to insert a mobile computer into a base station while both the mobile computer and the base station are powered and to reconfigure the mobile computer for operation with the devices connected to the base station. Thus, the present invention addresses the needs of computer users by supplying a computer-implemented process for configuring devices for a computer system and for accommodating seamless dynamic configuration changes of the computer system.

A system constructed in accordance with the present invention configures devices of a computer system by identifying the devices, determining the desired usage of the resources of the computer system, detecting and resolving potential conflicting uses of the resources, and allocating resources for use by the devices. An operating system runs on the computer system and supports these configuration tasks.

The computer system includes various resources, including interrupts, direct memory access (DMA) channels, memory addresses, and input/output (I/O) ports, at least one system bus, and devices. System busses are components that supply physical connections to devices. Each of the devices is connected to one of the system busses of the computer system.

The system busses can be compatible with a variety of bus architectures, including the Industry Standard Architecture (ISA), Micro Channel Architecture (MCA) and Extended Industry Standard Architecture (EISA) bus standards, as well as Personal Computer Memory Card International Association (PCMCIA), Small Computer Systems Interface (SCSI), Personal Computer Interface (PCI), Enhanced Capabilities Parallel (ECP), Vesa Local Bus (VL), Integrated Drive Electronics (IDE), and other bus standards. Typical devices supply the functions of system-level components, such as fixed and floppy disk controllers, display, keyboard, and mouse controllers, and serial and parallel controllers, and implement the functions offered by numerous add-on type adapter boards and peripheral devices.

Briefly described, the method for configuring the devices of the computer system is started by collecting device information for each of the devices of the computer system. This device information acquisition process permits the unique identification of the devices and the description of device characteristics associated with the operation of devices with the computer. A device driver, which enables communications between a corresponding device and the computer system. is thereafter identified for each of the devices in response to the device information. The resources, which support the functions of the devices within the computer, are allocated based upon the device information. This allocation process prevents any potential conflicting use of the resources by the devices. In response to resource allocation, the devices are configured and device drivers for the devices are loaded. The devices are thereafter activated for operation with the computer.

More particularly described, the present invention configures devices of a computer system based upon the collection of information about the devices and their connections to the system busses of the computer system. To collect the device information, a particular device is detected on the system bus of interest and thereafter assigned a device identification code that identifies the particular device as being connected to the selected system bus. At least a portion of the device identification code, specifically an identification code, uniquely identifies the detected device. Logical configuration data, which supplies configuration requirements for operating the particular device with the computer system, is also obtained for the detected device. This collection process is repeated until device information is eventually collected for each of the devices for all system busses of the computer system.

The device information is stored within computer system memory, such as volatile memory, to support the present configuration operation. At least a portion of the system memory is allocated for the storage of device information within a tree-like structure of device nodes. Each device connected to the computer system is represented by a device node that stores associated device information. Furthermore, if an identified device represents a newly installed device for the computer system, then this device information also can be stored in nonvolatile computer memory, such as a fixed disk, to supply an archival source of such information for future configuration tasks. A computer database having a hierarchical data arrangement is typically used to store this archival device information.

The collection of device information, which is also described as enumeration, is initiated in response to dynamic events that cause an asynchronous change in the operating state of the computer system. These events typically affect the use of the resources by the devices of the computer system and include: powering the computer system; connecting another device to a system bus; removing a device from a system bus; and inserting the computer system into or removing the computer system from an expansion unit or a docking station.

The collection of device information supplies data that supports the identification of device drivers for the identified devices. A device driver can be obtained from one of several alternative sources of the computer system, including

selected files of the operating system installed on the computer system, the device itself, a computer database maintained by the computer, or from the user via a disk containing the device driver. In general, the device driver for a device is often obtained by accessing a selected program file stored on either a fixed disk or another type of mass memory storage device of the computer system.

The computer database can contain device information associated with a particular device, including information for that particular device, which is also described as a primary device, and information for devices that are "compatible" with the primary device. For example, a first manufacturer's device may be compatible with a second manufacturer's device because both devices perform the same function and conform to an industry standard for operations. If the devices are compatible, a device driver for the first device often can be used to enable the operations of the second device and, likewise, a device driver for the second device can be used with the first device. Thus, a compatible device driver, if available, may be used to enable communications of the particular device with the computer system.

The stored device information for a particular device typically can be accessed by searching in the computer database for a location or a record that contains the identification code for the desired device. Thus, the identification code can be used as an entry key to search the records of the computer database. If the device information in a selected record describes the primary device, then the device driver intended for primary use with that device is maintained by the computer system and is available to support the device operations. Likewise, a compatible device driver is maintained by the computer system if compatible device information is stored within the selected record and associated with the particular device.

By convention, the primary device driver is typically selected to support the computer operations of the primary device over any of the device drivers for compatible devices. However, if the device driver for the primary device is not available, then a device driver for a compatible device is selected. In this event, if the compatible device information lists more than one device that is compatible with the particular device, then the compatible device having the highest priority or ranking is selected and used to support the operations of the particular device.

If neither the primary device driver nor a compatible device driver is available on the computer system, then the user can be requested to supply a substitute device driver that supports the operation of the device with the computer system. This request is typically supplied as a textual statement displayed on a display or monitor for the computer system or as an audio prompt generated by the computer system. In response to the request, the user can insert within the proper computer drive a flexible disk or other appropriate electronic media containing the device driver, thereby permitting the computer to access the device driver. The device driver then can be stored within an appropriate mass memory storage device and used to enable the communications between the particular device and the computer.

Resources, which typically include a finite set of resource elements, are allocated by first analyzing the device information to detect whether the devices require a potential conflicting use of resource elements for operation of the devices with the computer system. The desired resource element is assigned for use by a device if this resource assignment does not conflict with the use of that particular resource by another device. A resource element is available for use by a device if this element is neither reserved nor assigned for use by another device. Some resource elements are typically reserved for use by selected devices to insure the compatibility of the present invention with existing devices. Thus, if at least two of the devices require use of an identical resource element, then this potential resource conflict is arbitrated and resolved in an iterative manner based upon the device information and the finite resources of the computer. The resources are then assigned for use by the devices based upon this conflict-free solution.

In response to allocating the assigned resources to the devices, the devices are configured for operation with the computer system. Each device driver is loaded for use by the corresponding devices and the devices are activated for operation with the computer.

Focusing upon another aspect of the present invention, a system is provided for supporting the bus-specific operations of devices connected to a system bus of a computer system. This system, which is alternatively referred to as an enumerator or a bus driver, is assigned to operate with a specific system bus and is programmed to recognize the operating parameters of the assigned bus. Each system bus typically requires a unique configuration process that is based upon the architecture of the bus. The enumerator, which can be part of an operating system, directly supports the configuration of devices on its assigned bus by accessing device information for those devices and storing this data with a central memory. This enables an operating system for the computer system to be independent of the characteristics of a computer bus architecture because bus-specific information is handled by an abstraction layer, in this case, the enumerator.

The enumerator can perform three primary operations, specifically (1) detecting dynamic events causing an asynchronous change in the operating state of the computer system; (2) enumerating each of the devices connected to the assigned system bus in response to the detection of a dynamic event; and (3) supplying assigned resources to each of the devices in response to an allocation of resources. To implement these operations, the enumerator can include one or more elements that are responsible for those functions, namely an enumerate element, a configure element, and an event detect element. These functions are typically defined by the characteristics of its assigned system bus.

The enumerate element includes a detection module for detecting a particular device on the system bus and a collection module for retrieving device information from the particular device. The collection module obtains device information from the detected device and stores this data within device nodes of the computer memory to maintain an up-to-date inventory of the devices on the assigned system bus. Thus, the detection and collection modules operate in tandem to enumerate these devices. The computer memory can be a hierarchical database structure formed by a tree-like structure containing the device nodes, which represent each of the detected devices.

The configure element can include a receive module for receiving the allocation of assigned resource elements, an assigned resource storage module for storing the assigned resources within the device nodes of the computer memory, and a transmit module for supplying instructions about the assigned resources to the appropriate devices. In response to the assigned resources, the configure element accesses the device nodes in the computer memory and stores the appropriate resource element assignments.

The event detect element typically can detect the installation of a new device on the assigned system bus or the removal of an existing device. For example, device installation or removal can be detected by intercepting a particular interrupt signal or by periodically polling all of the available sockets of the bus to determine the installed devices. Likewise, the event detect element can detect the insertion of a computer system into or the removal of a computer system from a docking station. The event detect element is further responsive to booting the computer or the power state for the computer. In response to one of these events, the event detect element can supply the event detection information to the enumerate element, thereby initiating the enumeration process. The event detect element also can be responsive to certain query-type instruction signals containing commands for actions by the enumerator. These commands typically include: delete device information in a designated device node because the associated device has been removed from the computer, stop a present operation, and start a new operation.

Turning now to the enumeration process, a method is provided for identifying devices connected to a system bus of a computer system having resources. First, a particular device is detected on the system bus. For example, for the widely used ISA bus, devices are detected by instructing each of the devices to enter an inactive state, thereby disabling the function of the device. The detected device on the ISA bus is then isolated from the remaining devices to enable interference-free communication with the detected device. In contrast, for the PCMCIA bus, a particular device is detected by selecting the socket supplying the connection for that device. Thus, it can be seen that device detection is a bus-dependent operation and may vary among different bus architectures.

A device identification code is thereafter assigned to the detected device. The device identification code, which includes an identification code and a system bus code appended to the identification code, typically identifies this device as a certain device type that is connected to the system bus. The identification code typically contains a string of characters, such as American Standard Code for Information Interchange (ASCII) characters, which uniquely define the particular device. The identification code is useful for defining both the manufacturer of the associated component and the type of device, and for distinguishing between identical types of devices connected to the same system bus. The system bus code uniquely identifies the system bus associated with the connected device.

Logical configuration data is also obtained for the particular device to acquire the configuration requirements for operating the particular device with the computer system. The resources of a computer system generally offer a range of options or elements for using the resources. The logical configuration data includes resource requirement information that defines certain resources of the computer system which are necessary for proper operation of the particular device with the computer system. For example, resource requirement information for a modem may define a resource requirement for an interrupt within the range of interrupts 7–12. The logical configuration data also includes resource dependency information, which defines a particular combination of resource elements that are necessary for device operation. For a modem, typical resource dependency information may define the combination of interrupt IRQ**4** with I/**03F8** (COM PORT **2**).

The above-described steps of the identification process are repeated for each of the remaining devices connected to the system bus to permit the collection of device information from all connected devices. In the event that a device itself is implemented as a system bus, it may be necessary to identify device drivers, allocate resources, and load the identified device drivers prior to identifying any devices connected to this new system bus. For example, these tasks are typically completed prior to identifying a device connected to the PCMCIA bus which, in turn, is connected to an integrated expansion bus of the computer's system board, such as an ISA bus.

To assign the device identification code, the identification code can be accessed by reading the identification code from a memory storage device, such as read only memory (ROM) or a register, which is typically mounted on the interface board for the device. The system bus code is subsequently added to the identification code to complete the formation of the device identification code. The device identification code is thereafter typically stored within computer memory to support the configuration process.

Similarly, the logical configuration data can be retrieved from the particular device by reading the logical configuration data from the memory storage device for that device. The logical configuration data is thereafter stored within the computer memory and is associated with the device identification code for the particular device. In the event that the logical configuration data is not available from the particular device, at least a portion of the logical configuration data often can be retrieved from a selected file of the computer operating system, such as a configuration file, e.g., an .INF file.

The resource allocation process is supported by arbitrators that operate to determine the assignment of resource elements to the devices of the computer. An arbitrator is assigned to each resource of the computer system and is responsive to the resource requirement information and resource dependency information related to its resource to produce a conflict-free allocation of the resource elements. The arbitrator for a selected resource is programmed to recognize the characteristics of its resource. For example, the arbitrator for a interrupt resource of a conventional personal computer recognizes that this resource includes 16 interrupt elements.

An arbitrator includes an analysis element that is responsive to a possible configuration which defines the set of resource elements that are appropriate for operating the devices with the computer system. In response, the analysis element determines whether a particular resource element for a selected device is available for use by the selected device. The arbitrator also includes an assignment element for assigning the particular resource element for use by the selected device in response to determining that the particular resource element is available for use by the selected device.

Focusing upon yet another aspect of the present invention, a method is provided for obtaining a device driver to enable a device to communicate with a computer system. The computer system includes a database containing a set of records. Each record contains both a device identification field for storing the identification code of a primary device and a compatible device identification field for storing identification codes for compatible devices and at least one type of compatible device-related data.

Reviewing the data structure for a database record, the device identification field permits the recording of an identification code that identifies a primary device for operation with the computer. Likewise, the compatible device identification field permits the recording of both an identification

code that identifies the primary device and identification codes that identify compatible devices. If the compatible device identification field contains an entry for the primary device, then a device driver specifically intended to support the computer operations of that primary device is available on the computer system. Likewise, compatible device drivers are available to support computer operations for both the primary device and other associated compatible devices if the compatible device identification field contains identification codes for compatible devices.

As an option, the compatible device identification field also permits the recording of priority data to permit a further distinction between the devices represented by the compatible device identification codes. The priority data supports the selection for a device driver of one of the compatible devices over another compatible device driver based upon the assigned rankings of the compatible devices. For example, the priority data can include a preferred use ranking or priority assigned by the vendors for the compatible devices. The compatible device having the highest priority ranking is typically selected for installation.

To obtain the device driver for a certain primary device, the computer database is searched to locate a selected record which is associated with that device. The identification code for this device is used as the entry key for the database because it identifies the desired device. Upon locating the selected record, the compatible device identification field is reviewed to determine if this field contains the identification code for the certain primary device.

If the identification code for the certain primary device is located within the compatible device identification field of the selected record, then the corresponding primary device driver is selected for use with the computer system. Upon identifying the proper device driver, the task of retrieving the desired device driver from its storage location is controlled by the operating system in a conventional manner. The identified primary device driver often can be retrieved from the mass memory storage device of the computer system.

However, in the event that the compatible device identification field does not contain the identification code for this primary device, then this field is examined to determine if it contains one or more of the identification codes for compatible devices. If so, then the compatible device having the highest priority is selected and the corresponding device driver is retrieved from the computer system.

In the event that the compatible device identification field does not contain an identification code for a compatible device, then the computer system supplies to the user an indication of the absence of the necessary driver for associated device. This indication can be a text-based or a combined text/graphics message, which is displayed by the computer monitor or supplied to a printer, or an audio prompt or statement.

In furtherance of these principles, it is an object of the present invention to provide a system for configuring devices of a computer system.

It is a further object of the present invention to provide a system for configuring a new device connected to a computer system.

It is a further object of the present invention to provide a system for identifying the devices connected to a computer system.

It is a further object of the present invention to provide a system that identifies the resource usage and system resource options for a device by obtaining such information from the device.

It is a further object of the present invention to provide a system that optimally allocates resources for use by the devices of the computer system.

It is a further object of the present invention to provide a system that identifies the devices of the computer system, determines a working configuration for the devices, and loads the appropriate device drivers.

It is a further object of the present invention to provide a system that accommodates seamless dynamic configuration of resources by enabling the configuration of devices in response to docking a mobile computer to a base station, removing the mobile computer from the base station, adding a new device to a computer, or removing a device from the computer.

It is a further object of the present invention to supply remote and local access to information directed to the present configuration of the computer system and the types of devices connected to the computer system.

That the present invention accomplishes these objects and offers the above-described advantages will be apparent to those skilled in the art from the following description, the appended claims, and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is an overall block diagram of a computer system in which the preferred embodiment of the present invention is operative.

FIG. **2** is a block diagram that illustrates the preferred embodiment of the present invention.

FIG. **3** is a flow chart diagram that illustrates the steps of a method for configuring the devices of a computer system.

FIG. **4**A–C are flow chart diagrams that illustrate the preferred steps of a method for configuring the devices of a computer system in accordance with the preferred embodiment of the present invention.

FIG. **5** is a flow chart diagram that illustrates the preferred steps for a method for obtaining a compatible device driver for use with a device of the computer system.

FIG. **6** is a block diagram that illustrates the components of the preferred embodiment of the present invention.

FIGS. **7**A and **7**B are diagrams that illustrate one of the components of the preferred embodiment of the present invention, specifically a hardware tree comprising device nodes for storing device-related information for the present configuration of the computer system.

FIG. **8** is a diagram that illustrates one of the components of the preferred embodiment of the present invention, specifically a registry for storing archival device-related information for the computer system.

FIG. **9** is a block diagram that illustrates the elements of a component of the preferred embodiment of the present invention, specifically an enumerator.

FIG. **10** is a flow chart diagram that illustrates the preferred steps for a method for enumerating devices of a computer system.

FIGS. **11**A and **11**B are flow chart diagrams that illustrate the preferred steps for responding to dynamic events that affect the operating state of a computer system.

FIG. **12** is a block diagram that illustrates the elements of a component of the preferred embodiment of the present invention, specifically an arbitrator.

FIG. **13** is a flow chart diagram that illustrates the preferred steps for a method for assigning a resource for conflict-free use by a device of a computer.

DETAILED DESCRIPTION

To overcome the frustration of users with the present complicated and technical configuration processes for personal computers, the present invention provides a system for automatically configuring a peripheral device or an add-on type adapter board for use with a base or mobile computer system. The present invention enables a user to simply connect a new device to the computer, power the computer, and have the device properly work with the computer without user intervention. To provide this capability, the present invention determines the optimal configuration for the resources and enables the devices and the application programs to fully utilize the available resources. This can be accomplished for numerous computer bus architectures and types of devices.

The detailed description which follows is presented largely in terms of algorithms and symbolic representations of operations by conventional computer components, including a processor and memory storage devices. These algorithmic descriptions and symbolic representations are the means used by those skilled in the art to most effectively convey the substance of their work to others skilled in the art.

An algorithm is generally conceived to be a self-consistent sequence of steps leading to a desired result. These steps generally require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, or otherwise manipulated. It is convenient to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, records, files or the like. It will be appreciated that all of these terms, as well as similar terms, are associated with appropriate physical quantities and are merely convenient labels applied to these quantities.

Automated Configuration System

FIG. I shows a block diagram of the preferred operating environment, a computer system **8**, for the preferred embodiment of the present invention. The present invention is based upon computer-implemented processes that can be embodied in one or more computer programs for a data processing system, such as the computer **8**, to carry out the methods and functions described herein. This computer-implemented process operates upon electrical or other physical signals to generate the desired physical results. Referring now to FIG. **1**, the computer system **8** runs an operating system **10** that operates with a central processing unit (CPU) **12**, resources **14**, system busses **18**, devices **20**, and a computer control system **21**. The resources **14** include memory addresses for a memory **22**, interrupts **24**, direct memory access (DMA) channels **26**, and input/output (I/O) ports **28**. The system busses **18** typically include a local bus **13**, an integrated bus **15**, such as a system-level expansion bus, and at least one interface bus **17**. The computer **8** represents a typical configuration for a conventional personal computer and it will be understood that the present invention is not limited to operations with the disclosed configuration for the computer **8**.

The operating system **10** comprises a set of computer programs that control the internal functions of the computer system **8**, thereby allowing the computer **8** to run application software (not shown). For the preferred embodiment, the operating system **10** is a graphic-based operating system, such as the "WINDOWS" operating system available from the assignee for this application, Microsoft Corporation, Redmond, Wash. The operating system **10** is preferably installed on a mass memory storage device, such as a fixed disk drive, of the computer **8**. During computer operations, the operating system **10** is also allocated a portion of the memory **22** to support operations with the other components of the computer system **8**.

The CPU **12** is typically implemented as a microprocessor, such as the models 80386 or 80486 that are available from Intel Corporation, Santa Clara, Calif. The CPU **12** operates in combination with computer software, such as the operating system **10** and application programs, to control the operations of the computer **8**. One or more of the system busses **18** support communications of control, address, and data signals between the CPU **12** and the remaining components of the computer **8**.

The resources **14** represent the resources of a conventional personal computer, such as the computer **8**. The memory **22** is typically implemented by dynamic or volatile memory modules, such as random access memory (RAM), and static or nonvolatile memory modules, such as read only memory (ROM) units. The memory **22** preferably includes a conventional memory, which is the first 1024 kilobytes of dynamic memory in a personal computer, and an extended memory that extends above the 1024 kilobytes range. The interrupts **24**, also referred to as the interrupt request lines, are signal paths within the computer **8** that carry signals informing the recipient that the sender is ready to transmit or to receive data. The DMA channels **26** enable the devices **20** or a computer program running on the computer **8** to access the memory **22** without involvement by the CPU **12**. thereby supporting relatively fast data transfers. The I/O ports **28** represent ports used by the devices **20**, such as peripheral devices or adapter boards, to communicate with the CPU **12**.

The computer database **16** provides a central location for storage of archival information that supports the configuration of the devices **20**. Specifically, the computer database **16** stores general system hardware and software parameters, as will be described in more detail below with respect to FIG. **8**. The computer database **16** is preferably implemented by nonvolatile memory, such as a fixed disk or another type of mass storage memory device.

Each system bus **18** can be viewed as a "parent" capable of having "children" because a system bus provides a mechanism for connecting devices **20** to the computer **8**. The system busses **18** typically supply the signal paths for the exchange of data, control signals, and addressing information among the components of the computer **8** and peripheral components, including the devices **20**. The system busses **18** can be implemented as various bus architectures, such as the Industry Standard Architecture (ISA), Micro Channel Architecture (MCA), and Extended Industry Standard Architecture (EISA) standards, as well as Personal Computer Memory Card International Association (PCMCIA), Small Computer Systems Interface (SCSI), Personal Computer Interface (PCI), Enhanced Capabilities Parallel (ECP), Vesa Local Bus (VL), Integrated Drive Electronics (IDE), and other bus standards. The system busses **18** also can include local or personal computer (PC) busses, serial busses, and parallel busses. However, it will be understood that the present invention is not limited to operation with the above-described busses and that these busses are listed as representative of existing bus architectures.

The system busses **18** include the local bus **13**, the integrated bus **15**, and a pair of interface busses **17** and **17'**. The integrated bus **15** is preferably an integrated or "fixed" expansion-type bus that enables the direct connection of

peripheral devices or adapter boards to the computer **8**. In contrast, the interface busses **17** and **17'** are typically supplied by vendors as separate accessory or optional components that can be attached to the computer **8** via the local bus **13** or the integrated bus **15**. Nevertheless, both the interface busses **17** and **17'** permit the connection of additional devices to the computer **8**.

For the representative computing environment shown in FIG. **1**, the integrated bus **15** is implemented as an ISA bus and is connected to the local bus **13** on the system board of the computer **8**. In addition, the interface busses **17** and **17'** are respectively implemented as a SCSI bus and a PCMCIA bus. In particular, the SCSI bus is connected to the local bus **13** and the PCMCIA bus is connected to the integrated bus **15**.

The devices **20**, which are connected to the system busses **18**, represent the logical functions of components that can be connected to a personal computer. The devices **20** include components typically located on or connected to a system board of a personal computer, including system-level devices, such as I/O controllers (fixed and flexible disk controllers), keyboard controller, serial and parallel controllers, system timer, display controller, programmable interrupt controller (PIC), and DMA controller. The devices **20** further include the functional devices for peripheral adapter boards and interface boards. Thus, for the representative computing environment shown in FIG. **1**, the devices **20** include system-level devices (not shown), a modem card, and a network card.

A device **20** also can be implemented as a system bus **18** that is connected to another system bus. For example, in the computer **8**, the PCMCIA bus is connected to the ISA bus and is capable of supplying a connection to the computer **8** for other devices. Thus, the PCMCIA bus represents both a system bus **18** and a device **20** within the computer **8**. Likewise, both the ISA bus and the SCSI bus may be viewed as a system bus **18** and a device **20**. Following the earlier analogy to "parent" and "child" components, it will be appreciated that a system bus **18** may be both a "parent" and a "child" within the preferred operating environment of the computer **8**.

Although each of the devices **20** are shown in FIG. **1** as separate physical components, it will be understood that a computer component can contain more than one function and, accordingly, that component can contain more than one of the devices **20**. Thus, it will be useful to consider the device **20** as a logical device rather than as a physical device. It will be understood that the devices **20** supply the building blocks that are required to harness the computing power offered by the CPU **12** and the resources **14**.

With the exception of system-level devices, which are typically supplied as part of the system board of the computer **8**, a device **20** can be connected to a memory storage device **29**, such as a ROM or a register, for storing information about the associated device **20**. The memory storage device **29** is useful for storing device-related information that supports the configuration of the devices within the computer **8**. This device information typically includes a string of characters for uniquely identifying a corresponding device and resource usage data. For devices on adapter boards, the memory storage device **29** is preferably mounted on the board itself.

The inventors believe that the actual implementation of the memory storage device **29** can be any type of circuit or component that allows the device information to be accessed to support configuration operations. Typical data storage components include ROMs, registers, and other conventional memory components. Furthermore, the device-related information also can be "stored" by constructing circuitry that represents a "hard-wired" version of such information. Device information can be stored in a device-dependent fashion. Accordingly, it will be understood that the memory storage device **29** is not limited to the above-described implementations.

The computer control system **21** conducts initialization and test functions, as well as device configuration functions, when the computer **8** is first powered or "booted." Upon booting the computer **8**, one or more start-up programs begin to run to implement necessary initialization and test functions. These start-up programs may be implemented as stand-alone programs or are integrated to function within the framework of the operating system **10**.

The start-up programs typically include a basic input/output system (BIOS) program and a power-on self-test (POST) program. The BIOS program supplies device-level control or support services for the primary input/output devices of the computer during the boot "initialization" process. Furthermore, after boot, the BIOS program accepts requests from application programs or the operating system running on the computer and performs input/output services as requested by those programs. The POST program conducts a sequence of tests for certain system-level devices and resources, including memory, to verify the proper operation of the computer components that are required to be active upon completion of the boot process. The programs associated with the computer control system **21** are preferably stored in ROM located within the computer **8**, typically on the computer motherboard. The functions and operations of conventional BIOS and POST programs are well known and will not be further described herein. However, as described in more detail below, the computer control system **21** preferably includes a modified BIOS program that is further capable of (1) configuring the boot-level devices of the computer **8** and, if required, (2) detecting the insertion or removal of the computer **8** from a docking station or an expansion system. This modified BIOS program can be viewed as a type of system bus because it supplies connections to the system-level devices on the motherboard to support the configuration of such devices.

When viewed collectively, the CPU **12**, the resources **14**, a fixed disk including the computer database **16**, the system busses **18**, and the devices **20** represent the hardware components for a typical personal computer as embodied by the computer **8**. The devices **20**, which are connected to system busses **18** that are organized in a hierarchical manner, perform their respective functions by operating with the resources **14**. Nevertheless, with the exception of certain types of the peripheral devices or adapter boards, the typical user is rarely exposed to the technical aspects of computer operations. In view of the relative technical complexity of the typical personal computer, it will be appreciated that there is a need for a system for configuring the devices of a personal computer without substantial support by the user. The inventors' solution for this problem is a system that permits a user to simply connect or attach a desired device to a computer, power-on the computer, and thereafter use the function associated with the device. This configuration system is supported by the hardware components of its computing environment and the computer-implemented processes of the operating system **10** and the computer control system **21**.

FIG. **2** is a block diagram that illustrates the basic building blocks for the preferred embodiment of the configuration

system. Referring now to FIGS. **1** and **2**, the configuration system is useful for configuring the computer system **8** to insure that the devices **20** have conflict-free access to the resources **14**. Configuration logic **30**, which can be implemented as a portion of the operating system **10**, controls the configuration tasks. Specifically, the configuration logic **30** is supported by the operating system **10**, the computer control system **21**, and the processing and storage functions offered by the computer **8**.

In response to an event causing an asynchronous change in the operating state of the computer system **8**, the configuration logic **30** operates to collect device information from each of the devices **20**. For devices that have been designed to support the preferred operating system, this device information can be accessed by reading at least a portion of the data from a data storage mechanism associated with the device **20**, such as the memory storage device **29**. The configuration logic **30** thereafter allocates the resources **14** for the devices **20** in response to the collected device information. This prevents a conflicting, use of the resources **14** by the devices **20** within the computer system **8**.

To collect device information from a selected device **20** on one of the system busses **18**, the configuration logic **30** includes a detection module **31** for detecting a selected device on that bus and a collection module **32** for collecting device information from the detected device. Each system bus **18** in the computer **8** is preferably represented by a combination formed by a detection module **31** and a collection module **32**. This combination defines the enumeration function of a component of the operating system **10** that will be described in more detail below with respect to FIG. **6**, specifically an enumerator.

A driver identification module **33** responds to the device information by identifying a device driver for each of the devices **20** that supplied device information to the collection module **32**. The collected device information is then analyzed by an arbitration module **34** to determine whether the selected device requires a potential conflicting use of the resources **14**.

The arbitration module **34** assigns elements of the resources **14** by searching for available resource elements. As required, the arbitration module **34** resolves any potential conflicting use of an element of the resources **14** to enable the conflict-free allocation of a resource element to the selected device **20**. Each resource **14** can be represented by a self-contained component of the arbitration module **34** to permit the efficient addition of arbitration capabilities for new resources. A driver loading module **35** thereafter loads the identified device drivers for use by the devices **20** in response to the allocation of the necessary elements of the resources **14**.

FIG. **3** generally shows the steps for a method for configuring the devices **20** for operation with the computer system **8**. Turning now to FIGS. **1** and **3**, the computer-implemented process is started and device information is collected at step **37** for each of the devices **20**. For each device **20**, the device information includes identity data for uniquely identifying the corresponding device and resource allocation data for defining the resource requirements of the particular device. This device information is preferably associated with or otherwise linked with information for the corresponding system bus **18**. The resulting product of this data collection process can be viewed as an inventory of the devices **20** connected to the system bus **18** of the computer **8**.

For the devices that are designed to take advantage of the present inventive concept, at least a portion of the device information can be acquired by accessing the memory storage device **29**. However, certain system-level components and existing "legacy" boards containing devices **20** may not include a memory storage device **29** for storing such device-level information. In this event, the device-level information is preferably acquired from other sources, such as the BIOS program of the computer control system **21** or configuration files of the operating system **10**. For the legacy devices, certain device-level information can also be acquired by examining the signature-like responses output by these devices in response to command signals supplied to the I/O ports **28**.

A device driver is thereafter obtained at step **38** for each of the devices **20** in response to the device information. At step **39**, the resources **14**, which are used by the devices **20** during computing operations, are allocated based upon the device information. Resource allocation is preferably an iterative routine that attempts to identify and resolve potential resource conflicts prior to an actual conflicting use of the resources **14** by the devices **20** during operation of the computer **8**. In response to this allocation of the resources **14**, the device driver for each of the devices is loaded at step **40** and the devices **20** are subsequently activated for operation with the computer **8**, thereby terminating this configuration process.

Device information is preferably acquired for each of the devices **20**, including all devices **20** supported by peripheral devices, add-on type adapter boards, system-level devices, and certain system busses. However, in the event that one of the devices **20** itself is implemented as a system bus, it may be necessary to complete the configuration tasks for the identified devices **20** connected to the system bus **18** prior to detecting any devices on the newly identified system bus. These tasks include identifying device drivers, allocating resources, and loading identified device drivers for the remaining devices **20** on the first system bus prior to identifying any of the devices connected to this newly identified second system bus.

For the computer **8**, the steps shown in FIG. **3** are preferably first conducted for the devices **20** on the integrated bus **15** and thereafter repeated to permit the identification of the additional devices connected to the interface bus **17'**. This enables the devices **20** connected to the "parent" component represented by the ISA bus to be configured prior to the devices **20** on the "child" component of the PCMCIA bus. It will be understood that this type of configuration sequence is defined by the connection of second system bus (the PCMCIA bus) to a first system bus (the ISA bus).

In this manner, the devices **20** of the computer **8** are identified and associated with each of the system busses **18**. In addition, the resources **14** are efficiently allocated based upon the device information, and the device drivers are assigned and loaded to enable the operations of the devices **20** with the computer **8**. It will be understood that the proper configuration of the computer **8** is necessary for the devices **20** to use the resources **14** of the computer **8** and to communicate with the application programs (not shown) running on the computer **8**. Accordingly, the computer **8** is typically configured prior to using the devices **20** for the desired computing functions.

Although it is desirable to configure all of the devices **20** during the power-up or boot processes, particularly prior to completing the test and initialization routines of the com-

puter control system **21**, many resource conflicts cannot be fully resolved without complete knowledge of all resource requirements for the devices **20**. Nevertheless, the preferred system supports the configuration process during the computer start-up sequence for a limited set of the devices **20**, specifically those boot-level devices that are required to "come-up" active during the boot process. Thus, this pre-boot configuration process is completed for the "fixed" system-level devices on the computer's system board, which is also described as a motherboard. Likewise, the pre-boot configuration process is completed for the set of devices **20** that are connected to integrated expansion board, specifically the integrated bus **15**, and are required for boot-level operations. The remaining devices **20**, which also may require resource allocation, are preferably configured only after the computer **8** has completed the boot process.

FIGS. **4**A–C are flow chart diagrams illustrating the preferred steps of a method for configuring the devices of a computer system. Referring now to FIGS. **4**A–C, which are collectively described herein as FIG. **4**, and to FIG. **1**, the configuration process is initiated in step **41** by powering-up the computer **8**.

In step **42**, certain devices **20** on the system board, which are also described as system-level devices, are configured in response to powering the computer **8**. These system-level devices, which are configured based upon power-on default configuration settings, typically include I/O interfaces, the keyboard controller, the serial and parallel interfaces, the display controller, the system timer, the PIC, and the DMA controller. It will be appreciated that many of these components are mounted on the motherboard of a conventional personal computer. The system-level devices are preferably configured based upon default configuration parameters stored in the computer control system **21**. The default configuration parameters for the system-level devices in the computer **8** are defined by the resource requirements and resource dependencies for such devices.

The preferred configuration process is based upon the collection of device-specific information from each of the devices **20** of the computer **8** to support the allocation of the resources **14** to those connected devices. Thus, still referring to FIGS. **1** and **4**, the preferred configuration process continues for the devices **20** that are connected to the system-level expansion bus of the computer **8**, specifically the integrated bus **15**. In step **44**, the integrated bus **15** is selected and an enumerator (not shown) is loaded for the ISA bus. In subsequent steps, each of the devices **20** connected to the ISA bus of the computer **8** is examined to obtain device information.

In step **46**, one of the devices **20** on the selected ISA bus is detected to enable the communication of device information from the detected device **20**. For the ISA bus, the detected device is isolated from the remaining devices on the bus to permit interference-free communications with that device. Nevertheless, it will be appreciated that other types of system busses do not require isolation of the detected device to enable communications with that device. The preferred system for detecting the interface boards associated with the devices **20**, isolating a particular interface board, and collecting device information is described in a related application, U.S. patent application Ser. No. 08/023,689, filed Feb. 25, 1993, entitled "System and Method for Computer Interface Board Identification," which is assigned to the assignee for this application and hereby incorporated by reference. The system described in the referenced application automatically determines which interface boards are connected to a computer bus and automatically assigns parameter selections to ensure proper operation of the boards within the computer.

At step **48**, the detected device **20** is assigned a device identification code that preferably identifies the particular device as a certain device type connected to a selected bus, in this case, the integrated bus **15**. The device identification code comprises an identification code and a system bus code. The identification code comprises a data string which uniquely define the corresponding device. The identification code can include characters defined by the well known American Standard Code for Information Interchange (ASCII) or a combination of ASCII and non-ASCII data bytes. Similarly, the system bus code, which also can be implemented as a string of ASCII characters or a combination or ASCII and non-ASCII data, uniquely identifies a corresponding system bus. The identification code is typically supplied by the device **20**, whereas the system bus code is associated with the system bus **18** and is generated external to the device **20**. For example, a modem is preferably assigned an identification code that is different from the identification code for a printer, and different architecture expansion busses, such as ISA and MCA busses, are preassigned different system bus codes. Thus, the identification code defines the detected device and the system bus code defines the selected system bus that supplies the connection for the detected device.

For the preferred embodiment, the identification code is used to identify the class or the type of the device **20**. The vendor of the peripheral device associated with the device **20** typically defines the unique identification code for that device. Nevertheless, it will be appreciated that the identification code does not need to contain any information about the class or the type of the device **20**. Indeed, the only requirement for the device identification code is that the data string formed by this combination of the system bus code and the identification code should be consistently used each time the computer **8** boots to uniquely identify the particular device **20** on the selected bus **18**.

The collection of device information continues at step **50**. Specifically, logical configuration data is obtained for the detected device **20**. The logical configuration data is preferably logically linked to the device identification code for the particular device **20**. This device information is preferably stored in nonvolatile memory that is allocated for such use by the operating system **10**. In addition, if the particular device **20** represents a newly installed device for the computer **8**, then the device information is also stored within the computer database **16** to maintain an archival record of all of the devices **20** that have been installed for operation with the computer **8**.

The logical configuration data defines the set of resources **14** necessary for operation of the particular device **20** with the computer **8**. Specifically, the logical configuration data comprises both resource requirement information and resource dependency information. The resource requirement information defines certain resources **14** which are necessary for operation of the particular device **20**. It will be appreciated that computer resources, such as the resources **14**, include multiple resource options or elements, such as allocated memory ranges and a predefined set of interrupts, DMA channels, and I/O ports. Thus, the resource requirement information preferably defines a range of elements for each of the resources **14** required for the operation of the associated device. For example, a printer may require a communications port within a range of the I/O ports **28**. In contrast, the resource dependency information defines a particular combination of resource elements which are nec-

essary for the operation of the particular device **20**. For example, the resource dependency information for a modem may define a specific combination of an interrupt and an I/O port for the operation of that device.

Upon completing the collection of device information from the detected device **20**, an inquiry is conducted at step **52** to determine whether device information has been obtained from all of the devices **20** on selected bus, in this case, the integrated bus **15**. If the answer is negative, the "NO" branch is followed to the step **46** to continue the collection of device information from the remaining devices **20** on the integrated bus **15**. In contrast, the "YES" branch is followed to the step **54** if device information has been acquired from all such devices **20**. At this point, the device identity data and resource usage information have been obtained for each device **20** that either is a system-level device or is directly connected to the integrated bus **15**.

In step **54**, an inquiry is conducted to identify the subset of the devices **20** that must be active upon completion of the boot process. For the devices **20** that do not require a default-type configuration during the power-up sequence, the "NO" branch is followed to the step **56** and those devices preferably remain inactive during the power-up sequences. In contrast, the "YES" branch is followed from the step **54** to the step **58** for the devices **20** that must be activated during the boot process. Based upon this inventory of the identified devices **20** requiring activation during the boot process, a boot-level device driver for each of those devices is obtained in step **58** to enable communications between the boot-level devices and the computer **8**. These boot-level devices typically include the system-level devices **20** on the system board of the computer **8** and certain adapter boards connected to the integrated bus **15**, such as a display controller or a mass memory storage device controller, i.e., a fixed disk controller.

In step **60**, an inquiry is conducted to determine if the resources **14** required by the set of identified devices **20** requiring enablement for the boot process are conflict-free. If so, the "YES" branch is followed to step **64**. The resources required by these devices **20** are allocated during the step **64** and the required device drivers are subsequently loaded to permit boot-level operations. Alternatively, if the response to the inquiry in step **60** is negative, then the "NO" branch is followed to step **62** and the user is preferably supplied an error message based upon the detection of a resource conflict during the boot process. In response, the user may be required to power down the computer and manually reconfigure the computer **8**. However, it is not anticipated that a resource conflict for boot-level devices will be a common occurrence because the configurations for many of the boot-level devices mounted on the system board are typically pre-defined to be conflict-free by the computer vendor.

The above-described configuration steps **42–64** are preferably supported by software routines for the modified BIOS program of the computer control system **21**. The modified BIOS program supports the identification of each of the boot-level devices, including system-level devices and the boot-level devices on the integrated bus **15**, and stores device-related information within computer memory to support the configuration tasks for those devices. With the exception of the system-level devices. the configuration support supplied by the modified BIOS program concludes after the POST process is completed. Specifically, after POST, the control of the configuration process for all remaining devices **20** is preferably maintained by the operating system **10** rather than by the computer control system **21**.

Upon completion of this portion of the configuration process, the conventional POST and BOOT routines are then conducted for the computer **8** during the steps **66** and **68**, respectively. As a result of loading the operating system **10**, selected configuration files of the operating system **10**, such as Config.Sys and the Autoexec.Bat files, are processed by the computer **8**. The Config.Sys file is a system configuration file that contains parameters which determine how the computer will operate. The Autoexec.Bat file supports user customization of computer operations, particularly the handling of application programs. The operations of both Config.Sys and Autoexec.Bat files for conventional operating systems are well known and will not be described herein.

Although FIG. **4** shows a specific sequence for the POST and BOOT routines, it will be understood that the configuration process can be adapted to operate with a different sequence of those routines. For example, at least a portion of the task operations of the POST routine can be completed after power-up and prior to the configuration of system-level devices in step **42**.

Unlike the system board devices and the boot-level devices connected to the integrated bus **15**, which are respectively configured during steps **42** and **64**, the remaining devices **20** connected to the integrated bus **15** are configured only after the boot operations for the computer **8** have been completed. However, the configuration operations for the nonboot-level devices on the integrated bus **15** are supported by the collection of device information that occurred prior to the BOOT process of step **68**. In particular, this configuration process is supported by the current inventory of both the system board devices and the set of devices **20** connected to the integrated bus **15**.

At step **70**, the device drivers for this set of nonboot-level devices are identified in response to the device information collected during the preboot operation. The device drivers are typically identified by accessing corresponding device-related information that is stored in the computer database **16** or by accessing a predefined file of the operating system **10**. The process for identifying and obtaining the device drivers will be described in more detail below with respect to FIG. **5**.

The device information collected during the preboot operation further supports the allocation and the assignment of the resources **14** required by the nonboot-level devices on the integrated bus **15**. In step **72**, the resource requirements and dependencies for each of the nonboot-level devices **20** on the integrated system bus **15** are compared to the available resources **14**. This comparison permits a determination of whether a potential resource conflict exists. In an iterative fashion, potential resource conflicts are arbitrated and resolved prior to resource allocation. In step **74**, the resources **14** are allocated to the nonboot-level devices **20** based upon the arbitration results of the step **7** and those devices are configured in step **76**. In view of the allocated resources, the identified device drivers are loaded in step **78** and the devices are enabled for operation with the computer **8**. This arbitration process is described in more detail below with respect to FIG. **13**.

For the system board devices and the set of devices directly connected to the integrated bus **15**, device information has now been collected and stored in volatile computer memory and, as required for newly installed devices, in the nonvolatile memory of the computer database **16**. The device information for the devices **20** on the integrated bus **15** may identify one or more of the devices as another system bus **18** capable of supporting other connected

devices **20**. Device information has not yet been collected for the "children" devices of each system bus **18** connected to the integrated bus **15**. Nevertheless, for the preferred embodiment, the tasks of identifying device drivers, arbitrating and allocating the resources **14**, and loading the identified device drivers for the set of nonboot-level devices **20** on the integrated bus **15** enable the subsequent collection of device information from these children devices. Thus, at step **80**, an inquiry is conducted to determine whether any of the devices **20** on the selected integrated bus **15** are operable as system busses. If not, the "NO" branch is followed to step **82** and the automated configuration operation for the computer **8** is completed. In contrast, if another system bus is connected to the computer **8**, then the "YES" branch is followed to step **84** to continue the data collection process.

Referring still to FIGS. **1** and **4**, in step **84**, another one of the system busses **18** is selected to support the configuration of the set of the devices **20** connected to that selected bus. For the illustrative example of FIG. **1**, the interface bus **17'** is selected and the enumerator for that bus is loaded. One of the devices **20** on the interface bus **17'** is subsequently detected in step **86**. At step **88**, the detected device **20** is assigned a device identification code comprising the identification code for the detected device and the system bus code for the interface bus **17'**. Likewise, logical configuration data is obtained for the detected device **20** during the step **90** to define the resources **14** necessary for operation of the device.

Upon completing collection of device information from the detected device **20**, an inquiry is conducted at step **92** to determine whether device information has been obtained from all of the devices connected to the interface bus **17'**. If the answer is negative, the "NO" branch is followed to the step **86** to continue the collection of device information from those remaining devices **20**. In contrast, the "YES" branch is followed to the step **70** to enable the sequence of identifying device drivers, arbitrating and allocating the resources **14**, and loading the identified device drivers for the detected devices **20** of the interface bus **17'**. This process will be repeated until all of the system busses **18** within the computer **8** are detected.

It will be understood that the device information collection process has now been completed for the existing devices **20** of the computer **8**. Specifically, the device identification code and the logical configuration information have been collected from each of the devices **20**. This device information is preferably stored in the computer memory **22** to support any additional configuration operations that are necessitated by another asynchronous event affecting the operating state of the computer **8**.

It will be appreciated that existing personal computers generally do not include a modified BIOS program to implement the specific sequence defined by the steps **42** through steps **64** for the configuration process shown in FIG. **4**. Accordingly, for computers with a conventional BIOS program, the system board devices are configured by the BIOS program and the initialization processes performed by the POST and BOOT routines are conducted in a known manner in response to powering the computer system. After the completion of the boot sequences, an embodiment of the present invention supports the automated configuration of the remaining devices connected to this computer system.

Specifically, upon booting the computer, this postboot configuration process for a conventional computer starts at step **84** by selecting one of the system busses **18**. However, unlike the previously-described configuration operation, the integrated bus **15** is selected only after the completion of the BOOT routine. In this manner, the sequence of tasks starting at step **84** of FIG. **4** are completed to identify and characterize the existing devices **20** of the computer **8**, to identify the associated device drivers, to allocate the resources **14**, and to load the device drivers.

Referring now to FIG. **1**, a device driver for an associated device **20** can be obtained from one of several alternative sources of the computer system **8**, including the operating system **10**, the device **20** itself, or indirectly from the user via a disk containing the device driver. The preferred operating system **10** includes one or more files that contain device drivers for supporting the most commonly used peripheral devices and add-on type adapter boards. Similarly, the memory storage device **29** located on certain adapter boards also can be used for storing device drivers for operating the associated device with a personal computer. In addition, conventional peripheral devices and adapter boards are often times supplied by vendors with one or more computer disks containing installation software programs and supporting software programs, including device drivers. Upon loading a device driver for use by the computer **8**, the device driver is typically stored on the computer's mass storage memory device, such as a fixed disk.

To maintain an archival record for each device **20** installed on the computer **8**, the device information for a particular device is stored within a corresponding record of the computer database **16**. Thus, the central database **16** preferably maintains a set of records containing a listing of the identification codes for the devices **20** of the computer **8** and a listing of compatible device information. Each record contains a device identification field for storing an identification code associated with a certain primary device and a compatible device identification field for storing identification codes associated with both a primary device and corresponding compatible devices. A compatible device is a device that performs the same functions to achieve the same results in the same manner as the primary device. For example, a first modem card may be compatible with a second modem card because both cards perform the same function and conform to an industry standard for modem communications.

The compatible device identification field also permits the recording of priority data to permit a further distinction between the devices compatible with a primary device. For example, this priority data can include vendor-assigned ranking data and is supplied by ranking the identification codes for compatible devices in the preferred order of use. In this manner, priority data is supplied by the order in which the identification codes within the compatible device identification field are listed.

Table 1 shows a several of the data fields for a record of the computer database **16**. The first field, which is labeled "Device Identification", contains identification codes for the devices **20**. The second field, which is labeled "Compatible Device Identification", contains identification codes and related information for compatible devices. This information represents at least a portion of the data stored in typical record in the computer database **16**.

TABLE 1

Device Identification Identification Code	Compatible Device Identification Identification Code
Audio B3	Audio B3 Sblast Windows Sound

As shown in Table 1, each identification code in the device identification field has one or more corresponding entries in the compatible device identification field, namely entries for identification codes and installation dates. A primary device is identified in the device identification field by the identification code "AudioB3". The compatible device identification field also contains the same identification code. When the device identification field and the compatible device identification field contain the same identification code, a device driver specifically designed for use with the identified device is available on the computer **8**. This type of device driver is also described as a primary device driver. Thus, for the example shown in Table I, the primary device driver is available to support the operations of the particular device **20** identified by the entry "Audio B3" in the device identification field.

The primary device driver, if available, is preferably obtained to support the operations of the corresponding device **20**. If the primary device driver is not available, then the compatible device identification field is preferably searched for an entry representing a compatible device. If at least one compatible device entry is present, then a device driver that is compatible with the primary device is available on the computer **8**. It is well known that a device driver may support the operations of both the intended primary device and one or more other compatible devices sharing similar operating characteristics with the primary device. Thus, a "compatible" device driver, if available, may be used to enable communications of the particular device **20** with the computer system **8** in the absence of the primary device driver for that particular device. It will be understood that the primary device driver is intended to support the computer operations of the primary device, whereas each compatible device driver supports computer operations for the primary device and other compatible devices.

The compatible device identification field in Table 1 further shows a pair of identification codes associated with devices that are compatible with the "AudioB3" device, namely the devices identified by the codes "Sblast" and "Windows Sound". Compatible devices are identified by identification codes having names that are dissimilar to the identification code for the primary device.

For the preferred embodiment, the selection of a device driver corresponding to a compatible device is determined by the following convention: if a primary device driver is not available to support the particular device, then the device driver for the compatible device having the highest priority ranking is selected from the compatible device driver candidates. The identification code for the compatible device having the highest priority ranking is preferably listed within the compatible device identification field prior to any of the remaining identification codes. Thus, the identification codes for compatible devices are ordered based upon priority ranking assigned to those devices. Assuming the absence of the identification code for that primary device in the compatible device information field, this convention indicates that the "Sblast" device driver should be selected to support the "Audio B3" device based upon the order of the identification codes for the listed devices.

FIG. **5** is a flow chart diagram that illustrates the preferred steps for a method of obtaining a device driver for use with a device of the computer system. Turning now to FIGS. **1** and **5**, a computer-implemented process for obtaining a device driver is started in step **100** and proceeds to step **102**, where a determination is made whether the records of the computer database **16** contain an entry designating that a primary device driver corresponding to the particular device **20** is available on the computer **8**. To locate the record associated with the particular device **20**, the computer database **16** is searched by using the identification code for the particular device **20** as the entry key. If the identification code for the particular device **20** is found in both the device identification and compatible device **10** identification fields of a selected record, then the "YES" path is followed to step **104**. This affirmative response indicates that the primary device driver for the particular device **20** can be obtained on the computer **8**. A device driver maintained by the computer **8** typically can be retrieved by accessing a corresponding file on the fixed disk of the computer **8** and reading the stored device driver. For the preferred operating system **10**, certain device-related information, including the identity of device drivers for the corresponding device, is stored within information files called .INF files. In the step **104**, the device driver corresponding to the primary device is selected and assigned for use by the particular device **20**. The process concludes if the primary device driver is available. In contrast, if a positive match is not achieved, then the "NO" path is followed to the step **106**.

If the primary device driver for the device **20** is not available, then the compatible device identification field for the selected record is preferably searched in step **106** for an identification code that corresponds to a device that is "compatible" with the particular device **20**. If one or more of the identification codes representing compatible devices are contained in this field, then the "YES" branch is followed to the step **108**. In step **108**, the compatible device identification field is also searched for the identified compatible device having the highest priority ranking. The preferred compatible device is listed first within the compatible device identification field. Upon finding the preferred compatible device, the process proceeds to the step **110**. In the step **110**, the device driver corresponding to the compatible device having the highest priority ranking is selected and assigned for use with the particular device **20**. thereby concluding the search for a compatible device driver.

If the response to the step **106** is negative, then the "NO" branch is followed to the step **112**. The user is requested in step **112** to supply a substitute device driver for the supporting operation of the device with the computer system **8**. This request to is typically supplied as a text-based statement displayed on a display or monitor for the computer system **8** or as an audio prompt generated by the computer system **8**. In response to the request, the user can insert within the appropriate computer drive a flexible disk or another form of appropriate electronic media containing the device driver program, thereby permitting the computer **8** to access the device driver program. In response to reading the disk, in step **114**, the computer **8** stores the device driver program on a selected mass storage memory device.

In step **116**, the substitute device driver is obtained and instructed to enable the particular device **20** for operation with the computer **8**. In addition, to maintain the records on the computer database **16**, the identification code for the

device associated with the new substitute device driver is listed in the appropriate record(s) of the computer database **16**. This database update is achieved by adding the identification code for the device driver within the compatible device identification field for the record associated with the particular device **20**. In this manner, the archival record indicates that the substitute device driver supports the operations of the particular device **20** and has been installed for use on the computer **8**.

Automated Configuration System Components

FIG. **6** is a block diagram that illustrates the components and their structural communications links for the preferred embodiment of the operating system **10**. Referring to FIGS. **1** and **6**, the operating system **10** comprises numerous software programs or modules, including enumerators **150**, a hardware tree **152**, a registry **153**, arbitrators **154**, device drivers **156**, a configuration manager **158**, and a device configuration database **160**. The enumerators **150**, the registry **153**, the arbitrators **154**, and the device drivers **156** are associated with the configuration manager **158**. It will be understood that the operating system **10** also preferably interacts with a modified BIOS program of the computer control system **21** and various hardware components of the computer **8**, including the system busses **18** and the devices **20**, to support the configuration system.

These components are generally described within sections headed by their respective identifying legends and are best shown in FIGS. **6–8**. A more detailed review of certain components, namely the enumerator **150** and the arbitrator **154**, is also supplied below with respect to FIGS. **9–13**.

Enumerators

The enumerators **150** operate to report the identities of detected devices **20** on the system busses **18** in response to certain events that affect the operating state of the computer **8**. These events include changes to the state of power supplied to the computer **8**, including the states Power-on, Standby, Suspend, or Resume. The events also include the insertion of a device onto or the removal of a device from a system bus, or the insertion into or the removal of a computer system from a docking station or an expansion chassis. It will be appreciated that this connection (or removal) of a device **20** to the computer **8** can be completed by a physical connection or as a logical connection via a wireless communication link or a network. In addition, for certain devices **20**, the enumerators **150** also can transmit assigned resource elements from the configuration manager **158** for use by the devices **20** in response to an allocation of the resources **14**.

Each enumerator **150** is assigned to a component of the computer **8** that is capable of having children, namely, those components that provide a connection for yet another hardware component. It will be understood that computer busses, such as the system busses **18**, represent a common mechanism for connecting adapter boards and peripheral devices to a personal computer. In similar fashion, for the preferred computer control system **21**, the modified BIOS program represents a mechanism for providing a central connection for the system-level devices of a personal computer, including the interfaces for the keyboard controller, the display controller, the I/O controller, and the serial and parallel controllers. Thus, for a typical personal computer, the enumerators **150** can be assigned to the computer busses and to the modified BIOS program that supports the configuration of boot-level devices. For the computer **8** shown in FIG. **1**, individual enumerators **150** are assigned to the system busses **18**, including the local bus, the ISA bus, SCSI bus, and the PCMCIA bus, and to the modified BIOS program of the computer control system **21**.

For each system bus **18**, the associated enumerator **150** is programmed to recognize the operating characteristics of its assigned computer bus and to support the configuration of the devices **20** connected to that computer bus. Specifically, these enumerators obtain device-related information from the devices **20** and subsequently store such information within a central memory location of the hardware tree **152**. As outlined above, this collection of device information is initiated in response to the events affecting the enumerator's assigned system bus **18**, such as the insertion or removal of a device or a change in the power state of the computer **8**. It will be understood that this collection of device information from the devices **20** in the computer **8** is described as an enumeration process.

Likewise, for the computer control program **21**, an enumerator **150** can be programmed to recognize the system-level devices of the computer **8** and to support the configuration of those system-level devices. The enumerator **150** assigned to the modified BIOS program accesses the default-type configuration parameters for the system-level devices from the modified BIOS in response to events affecting the computer's operating state, including the power-on event, and stores this information within the hardware tree **152**. Furthermore, the enumerator **150** for the modified BIOS program can be programmed to detect the insertion of the computer into or the removal of the computer from a docking station and outputs an indication of these events to the configuration manager **158**.

A unique system bus code is associated with each of the enumerators **150**. For example, the ISA bus enumerator has a particular system bus code that is different from the system bus code assigned to the MCA bus enumerator. An enumerator **150** forms a device identification code for each device **20** connected to the assigned system bus **18** by appending its system bus code to the identification code for the device **20**. The device identification code also can include an instance number that is assigned by the enumerator **150** to distinguish identical devices **20** connected to the same system bus **18**.

An instance number can be obtained by the enumerator **150** from the device **20** itself, if available, or is assigned to the device **20**. By way of example, for the ISA bus, the ISA bus enumerator assigns an instance number to a logical device based upon a serial number that is stored in the memory storage device **29** associated with that device. If no serial number is available for the device **20**, then the enumerator **150** is required to use some other unique attribute to generate an uniquely addressable instance number. For the PCMCIA bus, an alternative scheme for assigning an instance number is based upon the use of the slot number for the bus socket connected to the device **20**.

The enumerator **150** also obtains logical configuration data for each of the devices **20** of the computer **8**. Logical configuration data is preferably linked to corresponding device information to maintain a logical link with the represented device **20**. For a typical device, the device identification code and the logical configuration data, which are collectively referred to as device information, are preferably stored within a device node associated with that device. Each device node is preferably maintained in the tree-like memory structure of the hardware tree **152**, as described below.

As a result of the resource assignment process, the enumerators **150** receive data packets containing assigned resource elements for the devices **20**. In response to receiv-

ing an assignment of the resources **14** for a particular device, the enumerator **150** accesses the appropriate device node to store the resource assignment. In this manner, the assigned resource information is maintained in a central memory location that is accessible by the device and, as required, by the device driver corresponding to that device. Thus, it will be appreciated that the assigned resources for the each of the devices **20** are stored within corresponding device nodes.

The enumerators **150** provide an abstraction layer that effectively separates the controller portion of the operating system **10**, the configuration manager **158**, from the underlying bus structures of the computer **8**. By placing the system bus-level information within the inventive concept of the driver-like enumerators **150**, the operating system **10** can be adapted to operate with a variety of present and future computer bus architectures. Thus, unlike conventional operating systems, the configuration manager **158** can communicate with a variety of system busses without any knowledge of the characteristics of those system busses because such information is supplied by the abstraction layer of the enumerators **150**. The structure and operations of the enumerators **150** are described in more detail below with respect to FIGS. **9** through **11**.

Hardware Tree

The hardware tree **152** supplies a hierarchical representation of the device identities, the resource usage requirements, and the resource assignments for the present devices **20** operating with the computer **8**. The data structure for the hardware tree **152** is maintained in a hierarchical arrangement of device nodes within an allocated portion of the nonvolatile memory supplied by the computer memory **22**. This stored information can be accessed by the operating system **10**. specifically the configuration manager **158**, by device drivers, or by application programs (via a common interrupt).

Each device node in the hardware tree **152** represents one of the devices **20** presently installed for operation with the computer **8** and generally contains three main attributes that describe the capabilities and resource requirements for that device. Upon the completion of data storage, the device node will include the device identification code, the logical configuration data, and the assigned resource elements. The device identification code is useful for accessing the hardware tree **152** and maps into a unique entry key for the archival data structure of the registry **153**. It will be appreciated that the device information for each device **20** is stored within a corresponding device node to enable all information pertaining to a common device to be maintained in a central storage location with the hardware tree **152**.

The device information collected from the devices **20** by the enumerators **150** is used to populate the device nodes of the hardware tree **152**. However, it will be understood that certain existing interface boards or peripheral devices do not include a mechanism for storing configuration data. Upon identifying these "legacy" devices, at least a part of the hardware tree **152** can be populated when the configuration manager **158** copies information for those devices to the hardware tree **152** from an available information source, such as the device configuration database **160** or text-based information files stored on a mass memory storage device of the computer **8**.

Because the hardware tree **152** reflects the identities, resource requirements, and current resource allocations for the existing devices **20**, the data stored within the hardware tree **152** can change each time the computer **8** boots with a new hardware configuration or in response either to adding a new device or to removing an existing device. Likewise, the insertion into or withdrawal of the computer **8** from a docking station can modify the data stored by the hardware tree **152**. Accordingly, it will be appreciated that the hardware tree **152** is a computer database containing device information which reflects a snapshot of the characteristics for the devices presently installed for operation with the computer **8**.

A user can access the device configuration information in the hardware tree **152** to verify the present configuration of its computer system. Access to this useful information can be achieved by either local or remote communications means, such as directly from the computer itself or via a network.

Referring to FIG. **7**A, which illustrates the tree-like data structure of the hardware tree **152** for the computer **8** shown in FIG. **1**, the hardware tree **152** contains a set of device nodes, including a device node **162** for the local bus, a device node **164** for the ISA bus, a device node **166** for the network card, a device node **168** for the modem card, a device node **170** for the SCSI bus, and a device node **171** for the PCMCIA bus.

A branch between any pair of the device nodes of the hardware tree **152** indicates that the connected device nodes share a common link. For example, upon entering the hardware tree **152**, the device node **164** for the ISA bus can be reached only by first passing through the local bus device node **162** and a branch **172**. This defines an interconnection between those system busses **18** (FIG. **1**), thereby supplying an indication that the ISA bus is connected to the local bus. Likewise, both the network card and the modem card are connected to the ISA bus because branches **174** and **176** respectively extend from the device node **164** to the device nodes **166** and **168**. In similar fashion, a branch **178** extending between the device nodes **164** and **171** indicates that the PCMCIA bus is connected to the ISA bus, and a branch **179** extending between the device nodes **162** and **170** indicates that the SCSI bus is connected to the local bus.

FIG. **7**B illustrates the data structure for a representative device node of the hardware tree **152**, in this case, the device node **168** for the modem card. Referring to FIGS. **7**A and **7**B, upon completion of the configuration of the modem card, the device node **168** preferably includes the device identification code, logical configuration data, and assigned resource elements. For the modem card, the device identification code is "*PNP0A00\Modem1234\0". A review of this device identification code indicates that the modem card is connected to the ISA bus, which is represented by the system bus code "*PNP0A00". In addition, the modem card is assigned an identification code "Modem1234\0" and is the first identified modem card of its type on the ISA base as evidenced by the instance number "0". The logical configuration data includes a specified combination of resource elements required for operation of the modem, in this case, the interrupt IRQ**3** and the I/O port I/O**3**F**8**. This is followed by the assigned resource elements, which, for this example, include this same resource combination of the interrupt IRQ**3** and the I/O port I/O**3**F**8**.

It will be appreciated that the above description of the attributes for the device node **168** is supplied as a representative example of the information that can be stored within a device node of the hardware tree **152**. However, it will be understood that the data stored within the device nodes of the hardware tree **152** can be different because each device node contains data describing the identification and resource requirements for the represented device.

Registry

Returning now to FIG. **6**, the registry **153** is a hierarchical, tree-structured database for storing various software and

hardware parameters, including device information. The registry **153** is initially stored within the nonvolatile memory of the computer database **16** upon installing the operating system **10** for use on the computer **8**. The registry **153** preferably contains hardware archival data, which is a superset of the memory-resident hardware tree **152**, and software archival data containing software-related parameters and software driver information.

In contrast to the hardware tree **152**, which contains device information for currently detected devices **20**, the registry **153** contains a complete listing of any and all hardware components that have been installed on the computer **8**. In this manner, even if a particular device **20** is removed for one session and then available again for the next session, the user will not be required to set-up the device again for the next session because all necessary device information is contained in the registry **153**. Thus, if a particular device **20** is removed from the computer **8**, the device information for that device **20** remains in archival storage within the registry **153**.

FIG. **8** shows the tree-like data structure for the registry **153**. Referring to FIGS. **6** and **8**, a root key **180** includes two branches, the software archive **182**, which contains software archival data, and the hardware archive **184** containing hardware archival data. The software archive **182** contains information related to location and identity of various program files, including the device drivers **156**. The hardware archive **184** can contain hardware-related information, including the identity of detected devices; any user-defined configuration; the "last working configuration"; and information concerning the loading of device drivers. The information maintained by the software archive **182** and the hardware archive **184** is organized into logical classes and additional branches extending from the archive branches are associated with the classes or categories of this information.

Focusing on the hardware archive **184** in FIG. **8**. an ENUM branch **186**, which represents the enumerators **150** for the operating system **10**, extends from the hardware archive **184**. The ENUM branch **186** includes the enumerator branches **188**, **190**, **192**, and **194**, which define the respective enumerators **150** for the local bus (root), the modified BIOS program (SysBIOS), the ISA bus (ISAENM), and the SCSI bus (SCSIENM). It will be understood that the device identification codes, which are assigned by each enumerator **150** to the detected devices **20**, operate as a key to the corresponding entries in the hardware archive **184** of the registry **153**.

The registry **153** also contains device branches for each of the devices **20** that have been installed during both past and present operations of the computer **8**. These tree-like device branches, which can extend from each of the enumerator branches, such as the branches **188**, **190**, **192**, and **194**, represent the past and present devices of the computer **8**. The device branches preferably contain pertinent device-related data, including an identification code, logical configuration data, and a pointer to the device driver for that device. Accordingly, the device branches, such as the branches **196** and **198**, represent the archival device-related information for devices that have operated in the past or at present with the computer **8** and can extend from each of the enumerator branches **188**, **190**, **192**, **194**.

The root branch **188**, which extends from the ENUM branch **186**, can include device branches representing device-related information for existing devices **20** that lack a mechanism for storing the identification code and the resource usage data. These devices, which are typically referred to as legacy or static devices, can be represented by branches extending from the root branch **188**. In similar fashion, the SysBIOS branch **190**, otherwise referred to as the system BIOS branch, also extends from the ENUM branch **186** and can include device branches representing the system-level devices located on the motherboard of the computer **8**. In addition, the SCSI branch **194**, which extends from the ENUM branch **186**, can include device branches representing device-related information for SCSI bus-compatible devices. Although it will be recognized that a personal computer is operable with system-level devices and one or more legacy devices and/or SCSI-compatible devices, device branches for these types of the devices **20** are not shown in FIG. **8** to simplify the illustration of the registry **153**.

Device branches **196** and **198**, which extend from the ISAENM branch **192**, are examples of typical device branches and represent the devices **20** that have been or are at present connected to the ISA bus. It will be appreciated that the device branches **196** and **198** represent typical devices connected to the ISA bus in the computer **8** and are shown in FIG. **8** as examples of the device branch concept for the registry **153**.

The Modem1234\0 branch **196**, which extends from the ISA bus branch **192**, indicates that a single device, in this case, the modem card having the identification code "Modem1234\0", is (or has been) connected to one of the system busses **18** (FIG. **1**), namely the ISA bus. In general, the identification code can represent the manufacturer's identity, the model of the corresponding device, and the instance number. For this example, the manufacturer is "Modem", the model is "1234", and the instance number is "0".

The PCMCIAENM branch **198** extending from the ISA bus branch **192** indicates that another device **20** having the device identification code PCMCIAENM is (or has been) connected to the ISA bus. This device identification code indicates that the detected device **20** is actually another bus, specifically the PCMCIA bus, which is capable of supporting the connections of additional devices **20**. Thus, the branch **198** also represents an enumerator branch because an enumerator **150** is assigned for the enumeration of any of the devices **20** connected to the PCMCIA bus. If the PCMCIA bus represented by this device branch is the parent for "children" devices, then the PCMCIAENM branch **198** can include device branches representing such devices on the PCMICA bus.

Arbitrators

Returning again to FIGS. **1** and **6**, it will be seen that each of the arbitrators **154** is assigned to a particular resource **14**. Arbitrators **154** operate to determine the assignments for their respective resources **14** in view of the resource requirements and dependencies for the devices **20** connected to the computer **8**. The arbitrators **154** are programmed to recognize the characteristics of their assigned resources **14**, including the specific elements of the corresponding resources. For example, the arbitrator **154** for the I/O ports **28** has a built-in knowledge base which confirms that a conflict can occur when assigning 16-bit addresses if the computer **8** is configured with one or more devices **20** that are performing 10-bit decoding operations. In addition, the arbitrators **154** preferably maintain a table of reserved resource elements to insure compatibility with the fixed designs of existing computer components. Reserved resource elements are generally available for use by certain devices **20** that are known to require the use of such resource elements.

In response to a potential working configuration for the detected devices **20**, each arbitrator **154** operates to allocate

its respective resource elements to the various devices **20** that require use of such resources during computer operations. For the computer **8**, the arbitrators **154** are assigned to handle access to the message addresses for the memory **22**, the interrupts **24**, the DMA channels **26**, and the I/O ports **28**. The arbitrators **154** are implemented as individual components that are separate from the remaining portion of the operating system **10** to allow the extension of the preferred operating system to other possible resources of a personal computer.

The arbitrators **154** work in tandem with the configuration manager **158** to complete the allocation and assignment of resources **14** to the devices **20**. For a selected arbitrator **154**, the configuration manager **158** supplies one or more possible configurations of elements of the corresponding resource **14**. This possible configuration is based upon the device information acquired for all of the devices **20** of the computer **8**. It will be appreciated that the resource portion of this device information, which can specify resource ranges, particular resource elements and resource dependencies for the devices, will support the prioritized ranking of possible configurations by the configuration manager **158**.

For a selected resource **14**, if a working configuration solution is developed by the corresponding arbitrator **154**, then the resulting resource element assignments are supplied to the configuration manager **158** to enable the allocation of the assigned resource elements to the proper devices **20**. However, if a potential resource conflict for a resource element is located by the arbitrator **154**, then an error flag is set to advise the configuration manager **158** that a working configuration is not available for this possible configuration. In this event, the configuration manager **158** can either supply an alternative configuration to this arbitrator **154**, if available based upon the device information, or can supply a message to the user that requests user input to resolve a resource conflict. Thus, it will be appreciated that the arbitrators **154** develop resource assignments for their respective resources **14** in an iterative fashion based upon the collected device information.

The structure of and the operations conducted by the arbitrators **154** will be described in more detail below with respect to FIGS. **12** and **13**.

Device Drivers

Device drivers **156** support communications between the devices **20** and the computer **8**. For proper computer operations, each device **20** is represented by a corresponding device driver **156**. Information for the device drivers **156** is stored within the registry **153** or can be accessed by reading certain configuration files of the preferred operating system **10**, such as the text-based information files called .INF files.

Configuration Manager

The configuration manager **158** controls the various configuration tasks conducted by the enumerators **150**, the hardware tree **152**, the registry **153**, the arbitrators **154**, and the device drivers **156**. When the computer **8** boots, the configuration manager **158** instructs the enumerators **150** to identify the devices **20** of the computer **8**, thereby enabling the acquisition of device information for those devices. The configuration manager **158** subsequently examines the device nodes of the hardware tree **152** and, for the devices **20** that are newly installed, will direct the transfer of device information to the registry **153** for archival storage.

The configuration manager **158** also controls the acquisition of appropriate device drivers **156** in response to the stored device information and directs the allocation of the resources **14** in response to the resource assignments supplied by the arbitrators **154**. Assigned resources are distributed by the configuration manager **158** to the appropriate enumerators **150** to support the resource allocation operation. To complete the configuration process, the configuration manager then controls the loading of the device drivers **156**. Accordingly, it will be appreciated that the configuration manager **158** effectively controls the configuration operations by operating as a "traffic cop" to direct the operations conducted by the other components of the operating system **10**.

Device Configuration Database

The device configuration database **160**, which is typically implemented as a program file of the operating system **10**, contains information about known computer components, including certain devices **20**, and their configuration requirements. Upon loading the operating system on the computer **8**, this program file is preferably stored on a computer mass storage memory device.

Unlike the registry **153**, the information stored in the device configuration database **160** does not necessarily represent data about the set of devices **20** that have been connected at one time or another for operation with the computer **8**. Instead, the device configuration database stores general component-level information about existing devices that can be installed for operation with a conventional personal computer, such as the computer **8**.

The configuration manager **158** can access the device configuration database **160** for each newly installed device represented in the hardware tree **152** and, if available, copies relevant information concerning the identified device into the registry **153**. The relevant information, which typically includes compatible device information and known resource requirements and dependencies, is maintained in the registry **153** by linking this information to the identification code for the identified device **20**. Thus, it will be understood that the identification code operates as an entry key for the device configuration database **160**.

In addition, during the initial set-up of the operating system **10**, information is preferably obtained from the device configuration database **160** for known "legacy" computer components that can be installed for operation with a conventional personal computer. Thus, this device information is preferably stored in the device configuration database **160** and, during the initial set-up of the operating system **10**, transferred to the registry **153** under the root branch **188**, as illustrated in FIG. **8**.

Referring now to FIGS. **1**, **6** and **7**, the configuration tasks are preferably conducted in at least two phases, a first configuration phase occurring after the computer **8** boots, and a second configuration phase conducted at the time of device initialization. During the first configuration phase, the modified BIOS program of the computer control system **21** initiates the enumeration of the devices **20** that are system-level devices on the motherboard of the computer **8**. Although a device node will be formed and stored within the hardware tree **152** for each of the system-level devices, most of these device nodes are not shown in FIG. **7** to simplify this explanation of the configuration phases. Thus, for purpose of this discussion, only the computer local bus **13** (root bus) and the integrated bus **15**, specifically the ISA bus, are considered as being identified by the operation conducted by the enumerator **150** for the modified BIOS program.

As shown in FIG. **7**, the device identification codes for the local bus and the ISA bus are respectively "Root\Root\" and "Root*PNP0A00\0". Focusing specifically on the device node **164** for the ISA bus, the system bus code is "Root" and the identification code is "*PNP0A00\0".

After enumerating the system-level devices and detecting the integrated bus **15**, device-related information is stored in

the hardware tree **152** for the existing legacy devices that were designed for use with conventional personal computers. The legacy devices are preferably added to the hardware tree **152** under the local bus device node **162**. Thus, the device node **170** for the SCSI bus is added at this time to the hardware tree **152** because the SCSI bus is considered to be an existing legacy-type device. For the device node **170**, the system bus code is "Root" and the identification code is "EISAID," which in combination form the device identification code "Root\EISAD\0." At the conclusion of the first configuration phase, the hardware tree **152** contains the device nodes **162**, **164** and **170**, and the registry **153** has been updated as necessary to reflect any new device information contained in the hardware tree **152**.

For the second configuration phase, the configuration manager **158** examines the hardware tree **152** for the entries associated with each device node of the hardware tree **152** and determines the set of devices **20** previously identified by the first configuration phase. In view of the entries for the system busses **18**, specifically the ISA bus and the SCSI bus, the configuration manager **158** instructs the assigned enumerators **150** to conduct enumeration operations for the ISA bus and the SCSI bus. For the ISA enumerator, device information is acquired for each of the devices **20** directly connected to the ISA bus, specifically the adapter boards implemented by network card and the modem card, and a system bus **18**, the PCMCIA bus. Thus, three new device nodes, the device nodes **166** (network card), **168** (modem card), and **171** (PCMCIA bus) are now added to the hardware tree **152** under the respective device identification codes "*PNP0A00\Net0", "*PNP0A00\Modem\0", and "*PNP0A00\PCMCIA\0".

In response to the identification of the additional devices **20**, the entries in the registry **153** also are updated to reflect the detection of newly installed devices as required. In turn, the appropriate device drivers **156** are identified for the network card and the modem card. The configuration manager **158** then instructs the appropriate arbitrators **154** to develop an assignment for the resources **14** based on the resource requirements and constraints for the detected devices **20**. In particular, the configuration manager **158** calls a selected arbitrator **154** and, if it returns a valid resource allocation, then the configuration manager **158** will call the next arbitrator **154** until all resources are properly allocated. If an invalid allocation is returned by one of the arbitrators **154**, the configuration manager **158** initiates a new round of exchanges with the arbitrators **154** based on other possible configurations supported by the various devices **20**. The assigned elements of the resources **14** will be supplied by the configuration manager **158** to the detected devices **20** via the abstraction layer supplied by the enumerators **150**.

Upon a determination of a proper working configuration and assignment of the necessary resources, the configuration manager **158** will instruct an associated device driver loader program (not shown) to load the identified device drivers **156**. The identified device drivers **156** are then loaded to enable the operation of the network card and the modem card with the computer **8**.

In view of the foregoing, it will be understood that a similar configuration process would be completed for the devices **20** connected to the PCMCIA bus and the SCSI bus of the computer **8**.

The operations implemented by the computer **8** are supported by the modules of the operating system **10**, including the enumerators **150**, the hardware tree **152**, the registry **153**, the arbitrators **154**, the device drivers **156**, the configuration manager **158**, and the device configuration database **160**, and the computer control system **21**. Specifically, the operating system **10** comprises a plurality of computer software programs and at least one program is associated with each of the components **150**, **152**, **153**, **154**, **156**, **158**, and **160**. Those persons skilled in the art will understand that the described computer-implemented processes can be coded as computer software programs using known software development techniques.

Enumerators

In view of the foregoing, it will be useful to revisit the subject of the enumerators **150** and to review the structure of and the tasks conducted by the enumerators **150**, as described below with respect to FIGS. **9–11**. Those skilled in the art will appreciate that each standard bus architecture typically requires a unique process for configuring connected devices based upon the characteristics for the system bus. Accordingly, each enumerator **150** is assigned to a corresponding system bus **18** (or the modified BIOS program of the computer control system **21**) and operates to support device configuration tasks in view of the characteristics of its assigned component. Although the operations of the enumerator **150** have been described in general terms, the actual implementation of those operations by each enumerator **150** is specific to the architecture for its assigned component. Thus, the enumerators **150** facilitate the development of an operating system that is independent of the characteristics of computer bus architectures because the enumerators **150** support the bus-specific tasks for device configuration.

Enumerator Elements

As required by the characteristics of its assigned system bus **18**, each enumerator **150** can conduct up to three separate tasks, specifically enumeration, device configuration, and detection of dynamic events affecting the operating state for the computer **8**. To facilitate a review of the operations by the enumerators **150**, these functions are shown in FIG. **9** as separate elements, specifically an enumerate element **200**, a configure element **202**, and an event detect element **204**. Referring to FIGS. **1**, **6**, and **9**, the enumerator **150** communicates with its assigned component, such as the system bus **18**, and the configuration manager **158** during the operations conducted by the elements **200**, **202**, and **204**. In addition, the enumerator **150** communicates with the hardware tree **152**, which is stored in the computer memory **22**, to store device information and assigned resource data. As shown in FIG. **9**, the enumerator **150** is assigned to one of the system busses **18**.

In response to an enumerate instruction from the configuration manager **158**, the enumerate element **200** begins to enumerate each of the devices **20** directly connected to its system bus **18**. A detection module **206** detects a selected device on the system bus **18**. For example, for the ISA bus enumerator, the detection module **206** instructs each device **20** to enter an inactive state and thereafter isolates a particular device **20** from the remaining devices on the system bus **18**. A collection module **208** can thereafter obtain the device information from the detected device. In this manner, the detection module **206** and the collection module **208** operate in tandem to enable the enumerate element **200** to collect device information from each of the devices **20** on its assigned system bus.

The collection module **208** can include submodules **210**, **212**, and **214** to support the acquisition of device information from the devices **20**. Specifically, the submodule **210** supports the retrieval of the identification code for the device

20 and the submodule 212 appends to the retrieved identification code the bus code for the assigned system bus 18, thereby forming the device identification code for that device. The submodule 214 supports the retrieval of logical configuration data to complete the acquisition of device information from the particular device 20. An additional submodule (not shown) can support the storage of the device identification code and the logical configuration data within a common device node of the hardware tree 152.

The configure element 202 responds to a data packet containing assigned resources by storing the assigned resource information within the appropriate device nodes of the hardware tree 152. The configure element 202 includes modules 218, 220, and 222 to support this communication of assigned resources between the configuration manager 158, the hardware tree 152, and, as required, the devices 20. Specifically, the module 218 receives the data packet of assigned resources 14 from the configuration manager 158. In response, the module 218 supplies the data packet containing the assigned resources to the modules 220 and 222. The module 222 can supply the assigned resources to the appropriate devices 20 whereas, in contrast, the module 220 stores the assigned resources within the appropriate device nodes of the hardware tree 152.

The event detect element 204 is responsive to the detection of a dynamic event that causes a change in the operating state of the assigned system bus 18. As described in more detail with respect to FIGS. 11A and B, the dynamic events can include connecting another device 20 to the assigned system bus 18 or removing one of the detected devices 20 from the system bus 18. The connection or removal of a device for certain system busses, such as the ISA bus and the PCMCIA bus, is represented by an interrupt signal supplied to the event detect element 204. In contrast, the event of powering the computer 8 is represented by a command signal issued by the configuration manager 158 to the event detect element 204. Accordingly, the event detection operation by the event detect element 204 represents the reception of the interrupt signal or the command signal and the resulting detection signal output in response to the reception of these signals. In response to a detection signal output by the event detect element 204, the configuration manager 158 typically initiates enumeration operations by outputting the enumeration instruction to the enumeration element 200.

The event detect element 204 also responds to commands contained in certain instruction signals from the configuration manager 158. These commands typically instruct the event detect element 204 to conduct specified query-type operations, including deletion of device information stored within a particular device node and to start or to terminate designated tasks.

Identification of Devices Connected to a System Bus

FIG. 10 is a flow chart diagram illustrating the preferred steps for the enumeration process that identifies the devices on a system bus of a computer system. Referring to FIGS. 6 and 10, the enumeration process starts at step 250 in response to an event that effects an asynchronous change in the operating state of the computer 8. Specifically, the enumeration process starts in response to powering the computer 8, adding a new device 20 to the computer 8, removing an existing device 20 from the computer 8 or, inserting the computer 8 into or removing the computer 8 from a docking station or expansion unit. In response to any of these events, the enumeration process starts at step 250 and proceeds to step 252 for the selection of a system bus 18. In step 256, a particular device 20 is then detected on the selected system bus 18 to enable the collection of device information.

To acquire the device information, in step 258 an identification code is retrieved from the particular device 20. In step 260, the system bus code, which is associated with the enumerator 150 assigned to the selected system bus 18, is appended to the retrieved identification code. This combination of the identification code and the system bus code forms the device identification code.

In similar fashion, the logical configuration data is retrieved from the particular device 20 during the step 262. Both resource requirement information and resource dependency information are accessed in the step 262. This completes the collection of device information from the particular device 20. To associate or link the logical configuration data with the particular device 20, the logical configuration data is added to the device identification code in the step 264. This completes the process of collecting device information for the particular device 20.

To acquire device information from the remaining devices 20, it is necessary for the enumeration process to continue. In step 266, an inquiry is conducted to determine if device information has been collected from the remaining devices 20 on the selected bus 18. If the response to this inquiry is negative, then the "NO" branch is followed to the step 256 and the collection process continues. However, if the answer is positive, then the "YES" branch is followed to the step 268 and the enumeration process for the selected system bus 18 is concluded.

For the selected system bus 18, it will be understood that the enumerator 150 assigned to this bus operates to detect each of the directly connected devices 20 and stores the collected device information within device nodes in the hardware tree 152. The enumerators 150 assigned to the remaining system busses 18 conduct similar data collection operations to complete the data entries in the hardware tree 152. In this manner, device nodes for the detected devices are constructed and stored in the hardware tree 152. As a result of this enumeration process, each device node in the hardware tree 152 contains at least (1) the combination of the system bus code and the identification code and (2) the logical configuration data for the corresponding devices.

During the enumeration process, certain information, including the device identification code and the logical configuration data, are obtained for the devices 20 of the computer 8. As previously described, the device identification code includes an identification code that uniquely identifies the associated device 20 and the logical configuration data preferably includes both resource requirement and resource dependency information. For example, for ISA-compatible devices, the identification code, also described as a serial identifier, is retrieved from the device by reading the serial data in a bit-wise manner. It will be useful to review the representative device-related information for devices compatible with the widely used ISA bus architecture. Nevertheless, it will be appreciated that the data structures for the identification code and logical configuration data associated with devices compatible with other bus architectures can be different from the data structures for ISA-compatible devices. Accordingly, the data structures for the device-related information may be defined by the corresponding bus architecture. In view of the foregoing, Table 2 shows the preferred data structure for an identification code of an ISA-compatible device.

TABLE 2

Field Name	Length	Definition
Vendor ID Byte 0	8 bits	Bit[7] - 0 Bits[6:2] - First character in compressed ASCII Bits[1:0] - Second character in compressed ASCII bits[4:3]
Vendor ID Byte 1	8 bits	Bits[7:5] - Second character in compressed ASCII bits[2:0] Bits[4:0] - Third character in compressed ASCII
Vendor ID Byte 2	8 bits	Product Number (Vendor Assigned)
Vendor ID Byte 3	8 bits	Product Number (Vendor Assigned)
Serial/Unique Number Byte 0	8 bits	Unique device number so the system can differentiate between multiple cards of the same type in one system. Bits[07:00]
Serial Number Byte 1	8 bits	Serial Number Bits[15:08]
Serial Number Byte 2	8 bits	Serial Number Bits[23:16]
Serial Number Byte 3	8 bits	Serial Number Bits[31:24]
Checksum	8 bits	Checksum of ID and serial number verifies that the information has been correctly read from the device.

Referring to Table 2 and FIG. **1**, the data structure for the identification code preferably includes three separate data fields for data representing a vendor identification number, also described as a Vendor ID, a serial number, and a checksum.

The Vendor ID comprises two 8-bit bytes containing a three character compressed ASCII identification of the vendor or manufacturer and two 8-bit bytes for a manufacturer-specific device code. The first portion of the Vendor ID identifies the vendor or manufacturer for the peripheral device or adapter board. The second portion of the Vendor ID is used by the vendor or manufacturer to identify the particular type of device. For example, the manufacturer may develop and market a variety of peripheral devices and adapter boards. Thus, the second portion allows the manufacturer to distinguish a first device type from a second device type. Similarly, if the peripheral device or adapter board contains more than one of the devices **20**, such as a parallel interface and a serial port interface, then the manufacture can use the second portion of the Vendor ID to indicate that the particular model of board contains two separate interfaces or devices. It will be appreciated that the Vendor ID serves as a unique identifier for the associated device.

The serial/unique number is a 32-bit serial number which is useful for differentiating between multiple devices **20** having the same Vendor ID when such devices are connected to the same bus system **18**. For this reason, the serial number is preferably used as an instance number during the enumeration process for the ISA-compatible components. Similar to the Vendor ID field, the serial number field comprises four 8-bit length bytes. Collectively, the Vendor ID and the serial number fields supply 64 bits to permit the unique identification of the manufacturer, the board or device type, and the serial number.

The checksum field is used to insure that no conflicts have occurred while reading the identification code from the board containing the device(s) **20**. A checksum verification operation is conducted when the serial data is acquired from the device **20** by the computer **8**. The use of a checksum is a conventional technique for detecting data transfer errors and will not be described in detail herein.

Continuing with the representative example of the ISA-compatible device, logistical configuration data is retrieved from this device one byte at a time in a sequential fashion. The logical configuration data is preferably read in serial fashion from the device **20** almost immediately after reading the checksum field of the identification code. The data structures for the logical configuration data support both small and large information items to minimize the amount of storage needed on the ISA-compatible component. The small and large information items are distinguished by "tagged" data structures. Tables 3A–B show the preferred data structure and the information for the small information items of an ISA-compatible device.

TABLE 3A

	Field		
Offset	Tag Bit [7]	Tag Bits [6:3}	Tag Bits [2:0]
Byte 0	Type = 0	Small item name	Length = n bytes
Bytes 1 to n		Actual information	

TABLE 3B

Small Item Name	Value
Version number	0 × 1
Logical device ID	0 × 2
Compatible device ID	0 × 3
IRQ format	0 × 4
DMA format	0 × 5
Start dependent function	0 × 6
End dependent function	0 × 7
I/O port descriptor	0 × 8
Fixed location I/O port descriptor	0 × 9
Reserved	0 × A–0 × D
Vendor defined	0 × E
End tag	0 × F

Referring to Table 3A, the data structure for the small item data has a size of 2–8 bytes. The first byte defines the type and size for most information and is followed by one or more bytes of actual information. Bit **7** of the first byte is used as the tag identifier to differentiate between a small item or a large item data type. Bits **3-6** define the small item name and bits **0–2** define the variable length of the small item data as "n" bytes. The remaining bytes within the small data type structure define the small data items for the logical configuration data.

Referring now to Table 3B and FIG. **1**, the small information items are defined for the ISA-compatible devices. Specifically, the small information items can include a version number, a logical device ID, a compatible device ID, an IRQ format, a DMA format, a start dependent function, an end dependent function, a I/O port descriptor, a fixed location I/O port descriptor, a vendor-defined field, and an end tag. These data items describe the resource configuration information for the associated peripheral device or adapter board.

The version number identifies the version of the configuration specification with which the associated board or device is compatible. The version number includes a vendor-specific version number and information about optional commands supported by the device.

The logical device ID field comprises a 32-bit identifier for the associated device **20**. It will be understood that certain interface boards or peripheral devices may contain more than one function, such as controlling both video and disk functions. Thus, each function is identified as a logical

device **20** that is associated with separate logical configuration data. This identifier also supports the selection of a device driver for the device **20**. The field also includes a bit that can be set if the device **20** should be activated by the computer control system **21** when the computer **8** is booted.

The compatible device ID field provides the identification codes of other devices with which the associated device **20** is compatible. As previously described with respect to FIG. **4**, the operating system **10** uses the compatible device ID code to support the loading of a compatible device driver if the primary device driver for the associated device is not available. It will be appreciated that there can be several compatible device IDs for each logical device. The order of these device IDs within the compatible device ID field may be used as a criteria for determining which of the compatible device drivers should be searched for and loaded first.

The IRQ data field defines that the associated device uses an interrupt level and supplies a mask with certain bits set to indicate the levels implemented by the device. It will be appreciated that there are **16** possible interrupt levels for an ISA-compatible device.

The DMA data field indicates that the associated device uses a DMA channel and supplies a mask with certain bits set to indicate the channels actually implemented for the device.

The start and end dependent function fields express the interdependencies of the set of resources required by the associated device. The arbitrators **154** use the defined interdependencies to make resource allocation decisions for the logical device.

The I/O port descriptor field includes a full function descriptor for programmable ISA-compatible cards whereas, in contrast, the fixed location I/O port descriptor field supplies a minimal descriptor for existing ISA-compatible devices with fixed I/O requirements.

The Vendor defined field is an optional resource that may be defined for vendor-specific use.

The end tag identifies the conclusion of the resource data and includes a checksum covering all resource data presented after the serial identifier.

For the logical configuration data, Tables 4A–B show the preferred data structure and the information for the large information items of an ISA-compatible device.

TABLE 4A

Offset	Field Name
Byte 0	Value = 1xxxxxxxB (Type = 1, Large item name = xxxxxxx)
Byte 1	Length of data items bits [7:0]
Byte 2	Length of data items bits [15:8]
Bytes 3 to n	Actual data items

TABLE 4B

Large Item Name	Value
Memory range descriptor	0 × 1
Identifier string (ANSI)	0 × 2
Identifier string (Unicode)	0 × 3
Vendor defined	0 × 4
Reserved	0 × 5–0 × 7F

Turning now to Table 4A, the large configuration data type structure permits larger amounts of data to be included within the configuration data. Bit **7** of the first byte is set to one to differentiate the large item information from small item information. Bytes **1** and **2** define a 16-bit length field for data items, thereby enabling up to 64 kilobytes of actual data items. Bytes **3** through n include actual large item data, including fields for a memory range descriptor, an identifier string (ANSI), an identifier string (Unicode), and Vendor-defined data, as shown in Table 4B.

Referring to Table 4B and FIG. **1**, the memory range descriptor field contains additional information about the characteristics of the memory on the device **20**, such as memory control parameters, decode parameters, cache support, and write status. The memory range descriptor field further finds the minimum and maximum ranges for the base memory addresses, the base alignment bits, and the memory range length.

The ANSI identifier string field defines an 8-bit ANSI data string and the Unicode identifier string field defines a Unicode data string. The Vendor-defined data field is an optional data field for vendor use.

Detection of Dynamic Events

FIGS. **11**A and **11**B are logic flow charts illustrating tasks conducted by the configuration system in response to certain events affecting the operating state of a computer system. FIG. **11**A shows the configuration steps completed in response to the removal of an installed device from a system bus **18**. In contrast, FIG. **11**B shows the configuration steps taken in response to detection of the insertion of a new device on a system bus **18**.

Referring now to FIGS. **6** and **11**A, the process starts at step **269** in response to the enumerator **150** receiving an interrupt signal indicating the removal of one of the devices **20** on its assigned system bus **18**. The enumerator **150** responds to detection of the device removal by reporting this dynamic event to the configuration manager **158** in step **270**. The configuration manager **158** subsequently instructs the device driver **156** for this device in step **272** to terminate access for the removed device. In step **274**, the configuration manager **158** instructs the arbitrators **154** to free the resource elements assigned to the removed device. In this manner, the resource elements previously assigned for use by the removed device become available for use by other devices **20** of the computer **8** as required by future configuration operations. In step **276**, the configuration manager **158** unloads the device driver **156** corresponding to the removed device and this device driver **156** becomes available for use by other compatible devices. The process ends at step **277**.

Turning now to FIGS. **6** and **11**B, the process starts at step **278** and the enumerator **150** detects the connection of a new device to its assigned system bus **18** in step **280**. The detection of this event is reported to the configuration manager **158** and, in response, the configuration manager **158** instructs the reporting enumerator **150** to enumerate the devices **20** on this affected system bus **18**. In step **282**, this enumerator **150** responds to the enumerate instruction by collecting device information from each of the devices **20** on the affected system bus **18**. For the newly installed device, a device node corresponding to this device **20** is added to the hardware tree **152**. In addition, if the new device represents a component which has not been previously installed with the computer **8**, this new device information is stored in the registry **153**.

Upon completion of the enumeration task, appropriate device drivers **156** are identified for use with the detected devices in step **284**. The elements for the resources **14** are subsequently allocated in step **286** and the identified device drivers **156** are loaded in step **288**. The process concludes at step **290**. Thus, it will be appreciated that the above-described process enables the installation of a new device within the computer **8** without substantial intervention by the user.

In general, the enumerator **150** detects the insertion into or the removal of a device **20** from a socket or post of its assigned system bus **18** by either receiving an interrupt signal generated by the computer **8** or by polling the system bus **18** on a systematic basis to determine the connected devices **20**. For the ISA, PCMCIA, and certain docking busses, the associated enumerator receives an interrupt signal that signifies a change of device connections for the affected system bus **18**. In contrast, for the SCSI bus and certain infrared link bus structures, it is necessary for the enumerator **150** to poll the associated system bus to determine whether a new device has been installed or an existing device removed from the polled bus.

Arbitrators

Arbitrator Elements

Turning now to a more detailed review of the tasks conducted by the arbitrators **154**, FIGS. **12** and **13** respectively show the elements for a selected arbitrator **154** and the preferred steps for the arbitration process. Referring now to FIGS. **6** and **12**, each arbitrator **154** is responsible for one of the resources **14** of the computer **8** and communicates with the configuration manager **158** via a bidirectional communications link to assign the elements of its particular resource **14**.

During device configuration, the configuration manager **158** develops a possible working configuration based upon the device information for the devices **20** connected to the computer **8**. For each resource **14**, this possible configuration defines resource elements that have been defined as being necessary for operating the devices **20** with the computer system **8**.

For some of the devices **20**, this possible configuration defines specific resource elements and, for others, the configuration describes general resource requirements. For example, if the arbitrator **154** is responsible for interrupts, a possible configuration for a modem defines specific interrupt elements, namely IRQ2 and IRQ3, whereas the configuration for another peripheral device may define a more general requirement for one of the set of interrupts supplied by the interrupt resource. Because the resource requirements for many of the devices **20** are general in nature, the configuration manager **158** often can supply alternative possible configurations as required to support the resource assignment activities of the arbitrator **154**. Possible configurations are device dependent because they are developed by the configuration manager **158** in response to the resource requirements and resource dependencies for the identified devices of the computer **8**. Thus, it will be appreciated that these possible configurations can be ordered by priority based upon the ranges for the specified resource requirements and the specific combinations of required resource elements.

The configuration manager **158** supplies a possible configuration to the selected arbitrator **154** to initiate the allocation of resource elements for a selected device. This possible configuration can be represented as an Assign-type instruction that defines the quantity and the range of resource elements for the designated device. For example, a typical instruction for the interrupt arbitrator is Assign (single IRQ, range=1–3, 5, and 9), which directs the assignment for a single interrupt within the range of a set of possible interrupts **1–3**, **5**, and **9**. Another representative instruction for the memory arbitrator is Assign (start=2000h, end=6000h, size=32K, alignment=1), which directs the allocation of a 32 k block of memory in the range of 2000h to 6000h.

To support the resource assignment tasks, each arbitrator **154** includes an analysis element **300** and an assignment element **302**. In response to a possible configuration from the configuration manager **158**, the analysis element **300** conducts an examination of the resource elements required by the designated device **20** to determine whether appropriate resource elements are available for use by that device. This analysis process is completed for each device **20** until the analysis element **300** locates appropriate resource elements for that device. However in the event that the analysis element **300** determines that appropriate resource elements are not available for a selected device **20**, then the analysis element **300** outputs an error flag to the configuration manager **158**. In response, the configuration manager **158** supplies an alternative possible configuration to the analysis element **300** to support the allocation of the required resource elements for that device **20**. This iterative analysis process will continue until resource elements are located by the analysis element **300** for each of the devices **20**.

Upon identifying available resource elements, the arbitrator **154** supplies this resource element information to the assignment element **302**. In response, the assignment element **302** assigns each resource element for use by the associated devices **20**.

Each arbitrator **154** also maintains a table **304** defining assigned resource elements and a table **306** defining reserved resource elements. Upon the assignment of a resource element for a particular device **20**, the assignment element **302** adds the assigned resource element as an entry to the assignment table. Thus, the assigned resource table **304** represents a list of the present resource element assignments for the installed devices **20** and each assigned resource element is matched to a corresponding device **20**. These assignment entries are modified in response to the removal of an existing device or the insertion of a new device **20** for the computer **8**. In addition, the assigned resource table **304** is rebuilt with new entries in response to powering the computer **8**.

The reserved resource elements defined in the reserved resource table **306** represent resource elements that are reserved for assignment to certain known devices **20** that require selected resource elements. It is well known that certain devices **20** are designed to use particular elements of one or more of the resources **14**. For example, a modem typically requires the use of the interrupts IRQ2 and IRQ3 and many printers are typically designed to use the interrupt IRQ7. Thus, it can be anticipated that certain devices **20** will require access to particular resource elements. Accordingly, for such known devices **20**, particular resource elements are held in reserve for use if such devices are actually installed for use with the computer system **8**. The reserved resource table **306** contains the listing of such devices and their corresponding required resource elements. The initial entries for the reserved resource table **306** are preferably constructed and stored prior to the delivery of the operating system **10** to the end user.

The analysis element **300** preferably accesses the tables **304** and **306** during the determination of whether a particular resource element is available for use by one of the installed devices **20**. This enables the analysis element **300** to determine whether a particular element of the resource **14** has been assigned or reserved for use by another device **20**. For reserved elements defined in the reserved resource table **306**, the analysis element **300** will generally assign those elements for use by only those devices **20** designated as rigidly requiring a specific resource element. Nevertheless, if the analysis element **300** has no other resource option, it may decide to assign a reserved element to a selected device **20** that is not designated as requiring a reserved resource.

The assigned resource table **304** can be stored within volatile memory because resource element assignments may change each time the computer **8** is powered. In contrast, the reserved resource table **306** is preferably stored within nonvolatile memory to maintain an archival list of known devices **20** requiring the use of certain resource elements.

The assignment element **302** is also responsible for removing one or more entries from the assigned resource table **304**. The assignment element **302** typically deletes a resource element assignment when an installed device **20** has been removed from the computer **8**. In response to a "deallocate" instruction by the configuration manager **158**, the assignment element deletes the resource assignments in the assigned resource table **304** for the designated device **20**. This permits those resource elements to be assigned for use by other devices **20**. A representative instruction for the memory arbitrator is the command Free (start=2000h, end= 2200h), which clears the assignment for the allocated memory extending between 2000h and 2200h.

The steps for the arbitration process for a selected arbitrator **154** and its associated resource **14** are shown in FIG. **13**. Referring now to FIGS. **6**, **12**, and **13**, the arbitration process is started in step **320** in response to the analysis element **300** receiving a possible configuration from the configuration manager **158**. In step **322**, an inquiry is conducted by the analysis element **300** to determine for a selected device **20** whether a particular appropriate resource element has been assigned for use by another device **20**. The analysis element **300** checks the resource assignments stored in the assigned resource table **304** to complete this inquiry. If the particular resource element is represented by an entry in the assigned resource table **304**, then the "YES" branch is followed to the step **320** and the analysis process is initiated again based upon another possible configuration. In contrast, if the particular resource element has not been assigned, then the "NO" branch is followed from the step **322** to step **324**.

In step **324**, an inquiry is conducted to determine if the particular resource element has been reserved for use by another device **20**. The analysis element **300** checks the reserved resource elements stored in the reserved resource table **306** to complete this inquiry. If the particular resource element is not reserved, then the "NO" branch is followed to step **328** and this element is assigned by the assignment element **302** for use by the selected device **20**. This resource element assignment is stored in the assigned resource table **304** and supplied to the configuration manager **158**. Upon assigning the appropriate resource element for the selected device **20**, the arbitration process can then be started again for yet another device **20** based upon a new possible configuration for that device. This new possible configuration is supplied to the analysis element **300** by the configuration manager **158**. However, in the event that the particular resource element has been reserved, then the "YES" branch is followed from step **324** to step **326**.

The analysis process continues through step **326** by conducting an inquiry whether another appropriate resource element is available and is not reserved for use by another device **20**. If so, the "YES" branch is followed from step **326** to step **328** and this element is assigned for use by the selected device **20**. In contrast, if the response to this inquiry is negative, the "NO" branch is followed to the step **320** and another possible configuration is obtained from the configuration manager **158**.

For the preferred configuration system, each arbitrator **154** is assigned to one of the resources **14** for the computer **8**. As previously described, the resources **14** for a conventional personal computer include addresses for the memory **22**, interrupts **24**, DMA channels **26**, and I/O ports **28**. Nevertheless, it will be appreciated that the resources **14** also can represent any type of resource having a finite quantity of resource elements which can be assigned for use by multiple consumers.

For example, power consumption represents another type of resource because the power supply for a conventional personal computer is capable of supplying a finite amount of electrical power for use by the components of that computer. Thus, power consumption can be divided among multiple power consumers, specifically the active components of the computer system. It will therefore be appreciated that an arbitrator **154** can be developed and used for the allocation and assignment of electrical power to the components of a computer system to conserve power consumption.

Other examples of resources **14** include SCSI identification codes, device identification codes, and logical drive designations. Similar to the example for the power consumption arbitrator, it will be appreciated that the resource allocation concept of the arbitrators **154** can be extended to these type of resources.

Although the preferred environment for the present invention is a personal computer system, it will be appreciated that the invention is also applicable to other types of data processing systems having resources that support the processing operations of the data processing system. Indeed, those skilled in the art will recognize that the principles of the present invention can be extended to other computer architectures and operating systems and are not limited to standard computer architectures or the preferred operating system described herein. Specifically, the inventors envision that the present invention is extendible to present and future bus architectures and device types.

In view of the foregoing, it will be understood that the present invention provides a system for automatically configuring devices for operation with a computer system. For devices that are capable of identifying themselves and declaring their services and resource requirements, the configuration system supports installation and configuration of such devices without user intervention. Devices of the computer system are configured by identifying the devices, determining the resource usage of those devices, detecting and resolving potential conflicting uses of the resources, and allocating the resources for use by the devices.

Device information is collected from the presently installed devices and stored within computer memory. This device information identifies the installed devices and supplies the resource requirements for those devices. Furthermore, the computer memory can maintain the assigned resource elements for the identified devices of the computer system. Accordingly, the present invention supplies a database containing the device identities, resource requirements, and assigned resource elements for each of the devices installed within the computer system.

It will be appreciated that this database can be accessed by the user to support a review of the present device configuration for the user's computer system. Likewise, this device information can be remotely accessed if the computer system is connected to a computer network or to a modem. Thus, the present invention also supports configuration management for a family of computers by enabling a central party to access and review the device configuration information for each of the computers within that family.

While there has been shown and described the preferred embodiment of the invention, it will be evident to those skilled in the art that various modifications and changes may be made thereto without departing from the spirit and the

scope of the invention as set forth in the appended claims and equivalents thereof.

We claim:

1. A method for identifying one of a plurality of device drivers maintained by a computer system, said computer system including a database,

said database containing a plurality of records, each of said records containing a device identification field and a compatible device identification field,

said device identification field operative for recording a primary identification code for identifying a primary device operable with said computer system, and

said compatible device identification field operative for recording said primary identification code, and for recording a plurality of compatible identification codes identifying compatible devices, each of said compatible devices being functionally compatible with said primary device,

said compatible device identification field further operative for recording priority data for said compatible devices, said priority data identifying a relative ranking for each of said compatible devices, said method comprising the steps of:

(a) searching said computer database to locate a selected one of said records containing a certain one of said primary identification code within said primary device identification field;

(b) reviewing said selected record to determine if said compatible device identification field contains said certain primary identification code;

(c) if said compatible device identification field contains said certain primary identification code, retrieving from said computer system a certain one of said device drivers corresponding to said certain primary identification code;

(d) if said compatible device identification field does not contain said certain primary identification code, reviewing said selected record to determine if said compatible device identification field contains at least one of said compatible identification codes;

(e) if said compatible device identification field contains at least one of said compatible identification codes, selecting one of said compatible identification codes for said compatible device that has the highest one of said rankings; and

(f) retrieving from said computer system another one of said device drivers corresponding to said selected compatible identification code.

2. The of claim 1 further comprising the step of supplying an indication that a corresponding device driver for said primary device is not available on said computer system if said compatible device identification field does not contain at least one of said compatible identification codes.

3. The method of claim 2 further comprising the step of installing a substitute device driver on the computer system in response to the indication that the corresponding device driver is not available on said computer system, the substitute device driver operative with both the primary device and at least a selected one of the compatible devices.

4. The method of claim 3 further comprising the step of updating the selected record by adding the compatible identification code for the selected compatible device within the compatible device identification field of the selected record in response to installing the substitute device driver on the computer.

5. The method of claim 1 further comprising the step of loading the certain device driver corresponding to the certain primary identification code in response to retrieving the certain device driver, and loading the device driver corresponding to the selected compatible identification code in response to retrieving the compatible device driver.

6. A computer-readable medium on which is stored a program module for identifying one of a plurality of device drivers maintained for use by a device of a computer, the computer including a database maintained in a memory storage device, the database containing a plurality of records, each of the records containing a device identification field and a compatible device identification field, the device identification field operative for recording a primary identification code for identifying a primary device operable with the computer, and the compatible device identification field operative for recording the primary identification code, and for recording a plurality of compatible identification codes identifying compatible devices, each of the compatible devices being functionally compatible with the primary device, the program module comprising instructions which, when executed by the programmed computer, performs the steps of:

(a) searching the computer database to locate a selected one of the records containing a certain one of the primary identification code within the primary device identification field, the certain primary identification code assigned to identify a selected primary device;

(b) reviewing the selected record to determine if the compatible device identification field contains the certain primary identification code;

(c) if the compatible device identification field contains the certain primary identification code, retrieving from the computer a certain one of the device drivers corresponding to the certain primary identification code, the certain device driver operative with the selected primary device;

(d) if the compatible device identification field does not contain the certain primary identification code, reviewing the selected record to determine if the compatible device identification field contains at least one of the compatible identification codes;

(e) if the compatible device identification field contains at least one of the compatible identification codes, selecting one of the compatible identification codes; and

(f) retrieving from the computer a selected one of the device drivers corresponding to the selected compatible identification code, the selected device driver operative with the selected primary device.

7. The computer-readable medium of claim 6, wherein the program module comprises further instructions which, when executed by the programmed computer, performs the step of loading the certain device driver corresponding to the certain primary identification code in response to retrieving the certain device driver, and loading the selected device driver corresponding to the selected compatible identification code in response to retrieving the selected compatible device driver.

8. The computer-readable medium of claim 6, wherein the compatible device identification field can record priority data for the compatible devices, the priority data identifying a relative ranking for each of the compatible devices, and the step of selecting one of the compatible identification codes comprises selecting the compatible identification code for the compatible device having the highest one of the rankings.

9. The computer-readable medium of claim 8, wherein the compatible identification codes for each record are ranked

ordered within the compatible device identification field based on the priority assigned to each of the corresponding compatible devices.

10. The computer-readable medium of claim **6**, wherein the program module comprises further instructions which, when executed by the programmed computer, performs the steps:

Generating a message in the event that the compatible device identification field does not contain the certain primary identification code and at least one compatible identification code, the message providing an indication of a need for installing on the computer a substitute device driver for use with the selected primary device corresponding to the certain primary identification code, the substitute device driver further operative with at least a selected one of the compatible devices; and

placing the compatible identification code for the selected compatible device within the compatible device identification field of the selected record in response to installation of the substitute device driver on the computer.

11. A computer operative to execute a program module for identifying one of a plurality of device drivers maintained by the computer, comprising:

a processing device;

a memory, coupled to the processing device, for storing the program module;

a database containing a plurality of records, each of the records containing a device identification field and a compatible device identification field, the device identification field operative for recording a primary identification code for identifying a primary device operable with the computer, and the compatible device identification field operative for recording the primary identification code, and for recording a plurality of compatible identification codes identifying compatible devices, each of the compatible devices being functionally compatible with the primary device, and

the processing device, responsive to instructions of the program module, operative to:

(a) search the computer database to locate a selected one of the records containing a certain one of the primary identification code within the primary device identification field;

(b) review the selected record to determine if the compatible device identification field contains the certain primary identification code;

(c) if the compatible device identification field contains the certain primary identification code, load one of the device drivers corresponding to the certain primary identification code;

(d) if the compatible device identification field does not contain the certain primary identification code, reviewing the selected record to determine if the compatible device identification field contains at least one of the compatible identification codes;

(e) if the compatible device identification field contains at least one of the compatible identification codes, selecting one of the compatible identification codes for the compatible devices; and

(f) load one of the device drivers corresponding to the selected compatible identification code.

12. The computer of claim **11**, wherein the compatible device identification field can record priority data for the compatible devices, the priority data identifying a relative ranking for each of the compatible devices.

13. The computer of claim **12**, wherein the processor selects one of the compatible identification codes by selecting the compatible identification code for the compatible device having the highest one of the rankings.

14. The computer of claim **12**, wherein the compatible identification codes are ranked-ordered within the compatible device identification field based on the priority data assigned to each of the corresponding compatible devices.

15. The computer of claim **11**, wherein the processor generates a message in the event that the compatible device identification field does not contain the certain primary identification code and at least one compatible identification code, the message presented on an output device connected to the processor and providing an indication of a need for installing a substitute device driver for use with the primary device corresponding to the certain primary identification code.

16. The computer of claim **15**, wherein one of the compatible device identification codes for the compatible device corresponding to the substitute device driver is placed with the compatible device identification field in response to installation of the substitute device driver on the computer.

17. A method for identifying one of a plurality of device drivers maintained by a computer, comprising the steps of:

(a) searching a database comprising records, the database maintained in a memory storage device of the computer, each of the records identifying a primary device operable with the computer and compatible devices functionally compatible with the primary device,

(b) locating a selected one of the records for the primary device;

(c) reviewing the selected record to determine if one of the device drivers is assigned for use with the primary device and is available for operation with the primary device;

(d) if so, retrieving the device driver designated for operation with the primary device;

(e) otherwise, reviewing the selected record to determine if a device driver is assigned for use with at least one compatible device compatible with the primary device and is available for operation with the primary device;

(f) if so, then selecting the device driver assigned to the compatible device compatible with the primary device and available for operation with the primary device.

18. The method of claim **17**, wherein each compatible device associated with a selected primary device is rank-ordered based on degree of compatibility with the selected primary device, and the step of selecting the device driver for the compatible device comprises selecting the compatible device having the highest ranking.

19. The method of claim **17**, wherein a message is generated in the event that neither the device driver assigned to the primary device nor at least one device driver for another device operable with the certain primary device driver is available for use with the primary device, the message providing an indication of a need for installing a substitute device driver compatible with the primary device.

20. A method for assigning a device driver to a peripheral device that is functionally connected to a computer system, comprising the steps of:

searching for a primary device driver for the peripheral device;

if the primary device driver for the peripheral device is located, assigning the primary device driver to the peripheral device regardless of whether the primary device driver is already assigned to another peripheral device;

if the primary device driver for the peripheral device is not located, searching for a first compatible device driver for the peripheral device;

if the first compatible device driver for the peripheral device is located, assigning the first compatible device driver to the peripheral device regardless of whether the first compatible device driver is already assigned to another peripheral device;

if the first compatible device driver for the peripheral device is not located, searching for a second compatible device driver for the peripheral device, the second compatible device driver having a lower assigned priority than the first compatible device driver; and

if the second compatible device driver for the peripheral device is located, assigning the second compatible device driver to the peripheral device regardless of whether the second compatible device driver is already assigned to another peripheral device.

21. The method of claim **20**, wherein:

the step of searching for a primary device driver comprises the steps of,

searching a database comprising a plurality of records, each record containing a device identification field and a compatible device identification field,

locating a primary device code associated with the peripheral device in the device identification field of a certain record of the database, and

searching for a primary device driver associated with the primary device code; and

the step of searching for a compatible device driver comprises the steps of,

locating a compatible device code associated with the peripheral device in the compatible device identification field of the certain record of the database, and

searching for a compatible device driver associated with the compatible device code.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 5,819,107
DATED : October 6, 1998
INVENTOR(S) : Lichtman, et. al.

It is certified that error appears in the above-indentified patent and that said Letters Patent is hereby corrected as shown below:

Title page, item [75], inventors should read --

Moshe Lichtman, Bellevue; Thomas E. Lennon, Seattle; Ralph A. Lipe, Woodinville; Pierre-Yves Santerre, Bellevue, all of Wash.--

Signed and Sealed this

Nineteenth Day of October, 1999

Attest:

Attesting Officer

Q. TODD DICKINSON

Acting Commissioner of Patents and Trademarks